

QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

Pile Dynamics
17-Oct-16 05:17

FS 10

BN 1171
SL 759/ 3440/ 99

PJ:
PN: HOPBAR

TG F2 -- US
A2 F2 3.3


LE 39.6 ft
AR 1.7 in2
EM 30000 Ksi
SP 0.492 K/ft3
WS 16810 ft/s
WC 16862 ft/s

JC 0.40
FM 1.00
VM 1.00

EA/C 30.3 Ks/ft
UN KIERSO
FR 20000 MB 30

DL -39
UT -1
PK 1 TM-PEAK

F1 500
F2 213
A1 999
A2 995

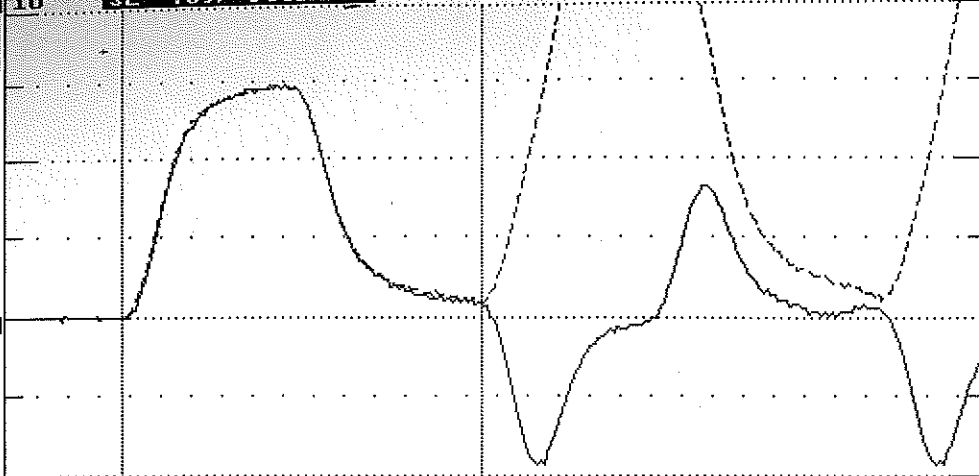

TS 12 B PD: 51602-a75 LP 0.00 ft
TB 8.0 T1 9.5 2L/C 4.7 VA 1000 VE 1022 LI 1.0

~~ACCEPT~~ SQ-OFF FL-OFF PR-OFF



contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

VMX= 4.8 FMX= 75 AMX= 139
EMX= 0.3 MEX= 147 FVP= 1.01

ACCELEROMETER CALIBRATION N.I.S.T. Traceable
SERIAL NUMBER: 51602 HAMMER
CALIBRATION FACTOR: 995 %
PAK (*5000): DATE: 19OCT16
PDA OPERATOR: *[Signature]*

<-AT:PIEZORESISTIVE

OP: laine [ver:4.05]

AT:PIEZOELECTRIC->