

QBTA: ON [ALT-F1/BB=601

Pile Dynamics, Inc.

DPF

Pile Dynamics
18-May-15 08:01

FS 10

BN 272
SL 471/ 3440/ 2

PJ: PN: HOPBAR

TG F2 -- US
A2 F2 3.3

LE 39.6 ft
AR 1.7 in2
EM 30000 Ksi
SP 0.492 K/ft3
WS 16810 ft/s
WC 16862 ft/s


JC 0.40
FM 1.00
UM 1.00

EA/C 30.3 Ks/ft
UN KIPS/ft
FR 20000 MB 30

DL -40'
UT -1
PK 1 TM-PEAK

F1 500
F2 213
A1 999
A2 955

TS 12 B PD: 51606-a075 LP 0.00 ft
TB 8.0 T1 9.6 2L/C 4.7 VA 1000 UE 1022 LI 1.0

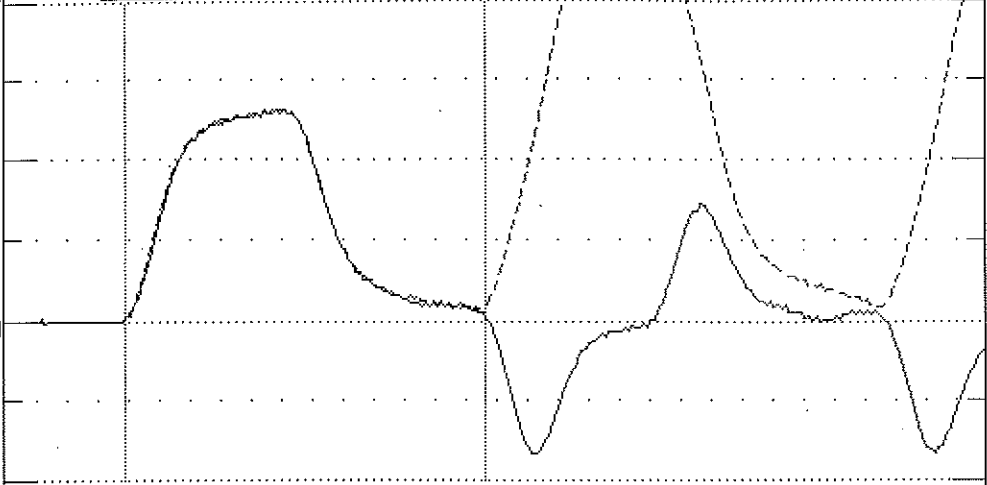

ADDER SQ-OFF FL-OFF PR-OFF



contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

VMX= 4.3 FMX= 66 AMX= 129
EMX= 0.3 MEX= 129 FVP= 0.99

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 51606

CALIBRATION FACTOR: 955%

PAK (5000): DATE: 21MAY15

PDA OPERATOR: J.M.W.

<-AT:PIEZORESISTIVE

OP: laine [ver:4.05]

AT:PIEZOELECTRIC->

Smart Sensor

Smart Chip Programmed By J.M.W. on 21MAY15 CRC Value C376