



QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

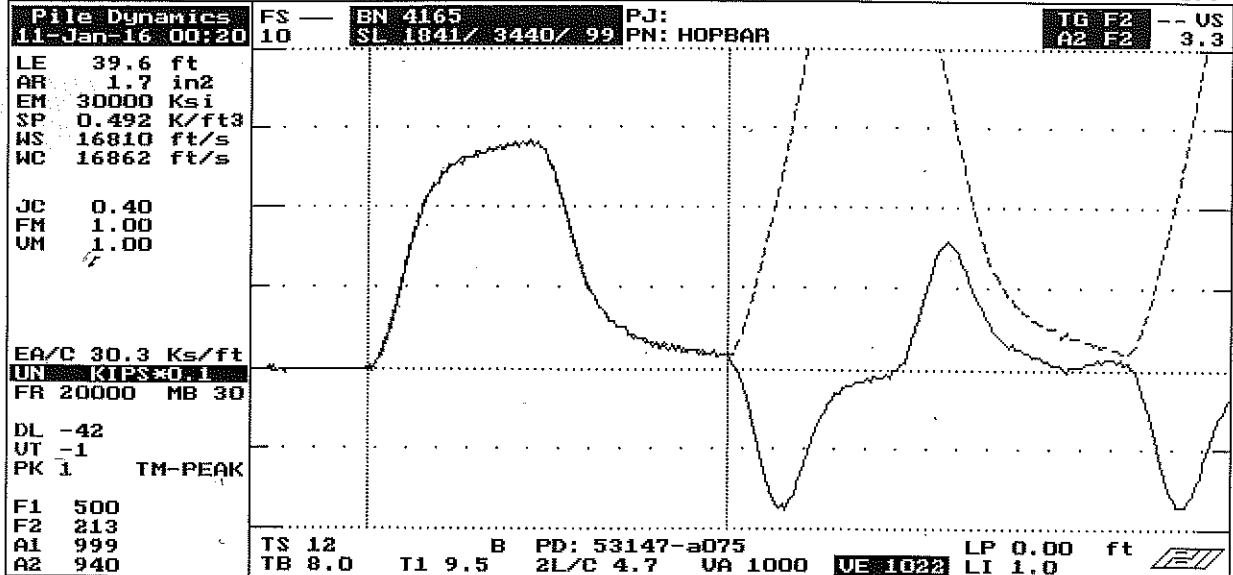

<input type="checkbox"/> ACCEPT <input type="checkbox"/> SQ-OFF <input type="checkbox"/> FL-OFF <input type="checkbox"/> PR-OFF  contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916	UMX= 4.6 FMX= 70 AMX= 139 EMX= 0.3 MEX= 137 FUP= 0.99 ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: 53147 CALIBRATION FACTOR: 940 % PAK <*(5000)*> DATE: 15JAN16 PDA OPERATOR: <i>[Signature]</i>
--	---

<-AT:PIEZORESISTIVE

OP: laine [ver:4.05]

AT:PIEZOELECTRIC->

Smart Sensor

Smart Chip Programmed By R.M.W. on 15JAN16 CRC Value B0B9