



QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

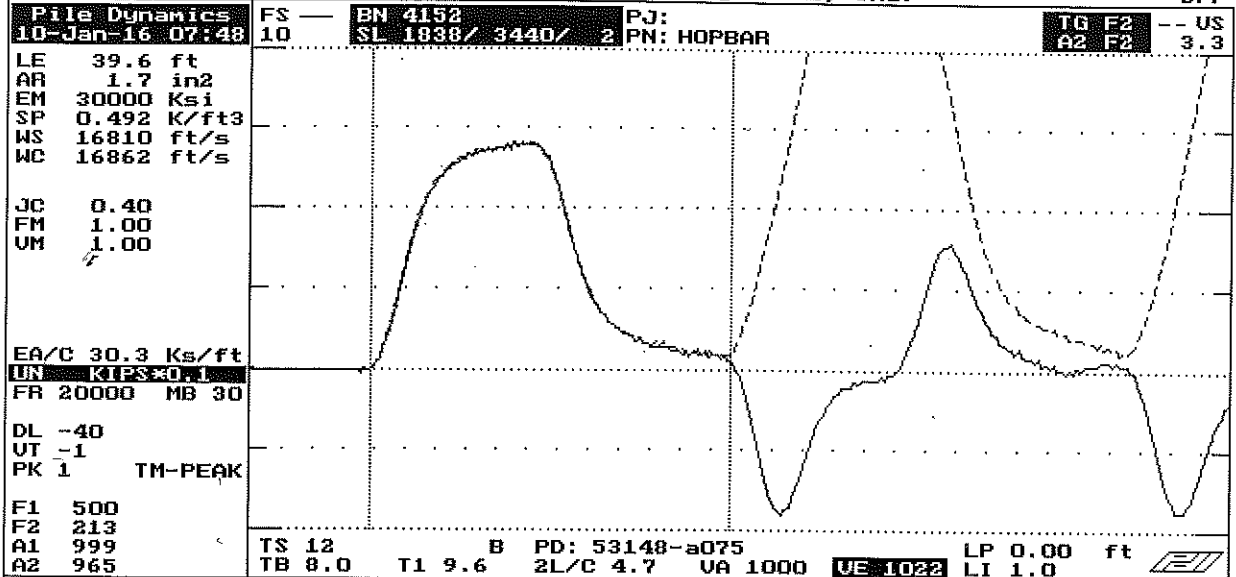

ACCEPT SQ-OFF FL-OFF PR-OFF	UMX= 4.6	FMX= 71	AMX= 139
	EMX= 0.3	MEX= 139	FVP= 1.00
	ACCELEROMETER CALIBRATION N.I.S.T. Traceable		
contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916	SERIAL NUMBER: <u>53148</u>		
	CALIBRATION FACTOR: <u>965%</u>		
	PAK (*5000): _____ DATE: <u>15JAN16</u>		
	PDA OPERATOR: <u>[Signature]</u>		
<-AT:PIEZORESISTIVE	OP: laine [ver:4.05]	[AT:PIEZOELECTRIC->	

Smart Sensor

Smart Chip Programmed By R.M.W. on 15JAN16 CRC Value 6328