



QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

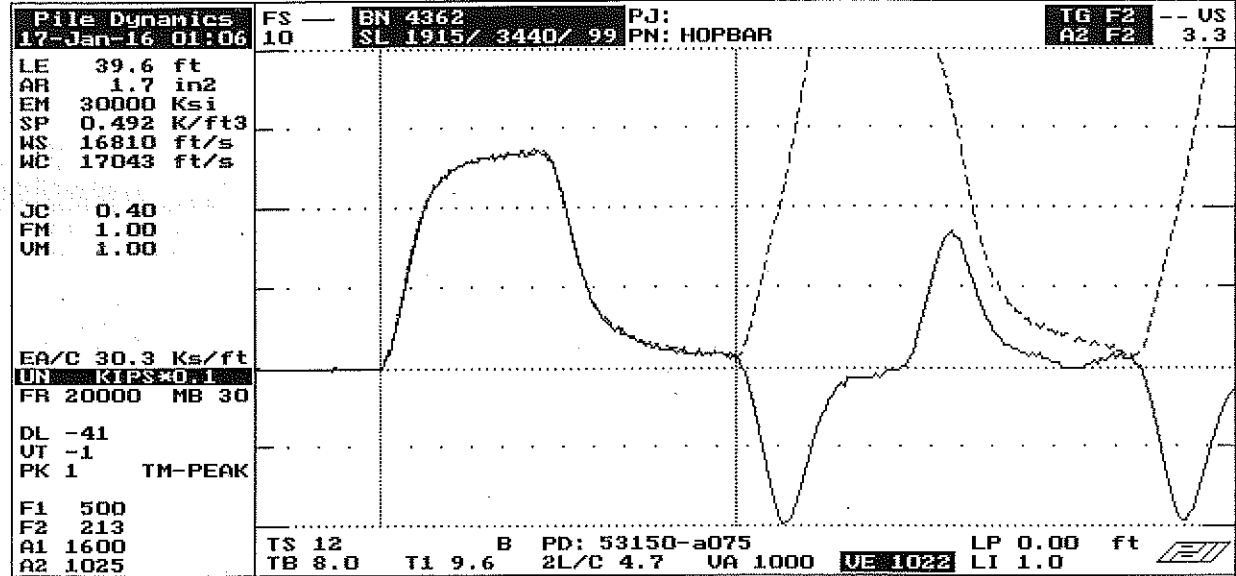

ACCEPT SQ-OFF FL-OFF PR-OFF  contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916	VMX= 4.4 FMX= 68 AMX= 149 EMX= 0.3 MEX= 133 FVP= 0.98 ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: 53150 CALIBRATION FACTOR: 1025% PAK (*5000): DATE: 21JAN16 PDA OPERATOR: <i>[Signature]</i> OP: laine lver:4.051
--	---

<-AT:PIEZORESISTIVE

AT:PIEZOELECTRIC->

Smart Sensor

Smart Chip Programmed By J.M.W. on 21JAN16 CRC Value 1333