


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

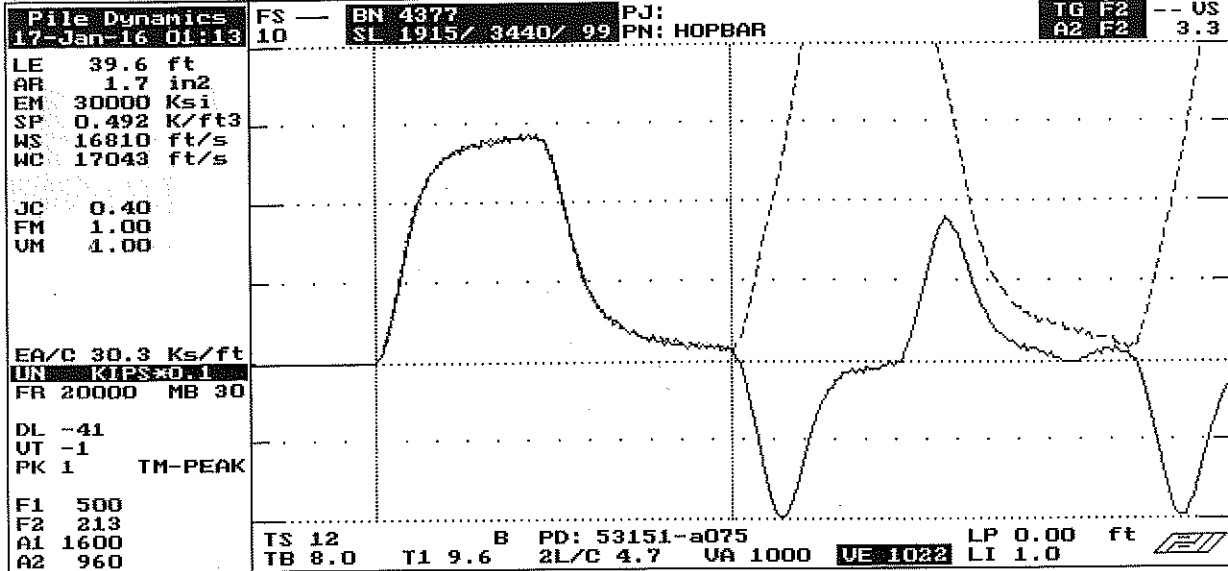

ACCEPT SQ-OFF FL-OFF PR-OFF	VMX= 4.6	FMX= 72	AMX= 159
	EMX= 0.3	MEX= 141	FVP= 1.00
	ACCELEROMETER CALIBRATION N.I.S.T. Traceable		
	SERIAL NUMBER: 53151		
	CALIBRATION FACTOR: 960 %		
	PAK (←5000):	DATE: 21 JAN 16	
	PDA OPERATOR: <i>[Signature]</i>		
←-AT:PIEZORESISTIVE	OP: laine [ver:4.05]	AT:PIEZOELECTRIC-→	



contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

Smart Sensor

Smart Chip Programmed By A.M.W. on 21 JAN 16 CRC Value E321