


QBTA: DN [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

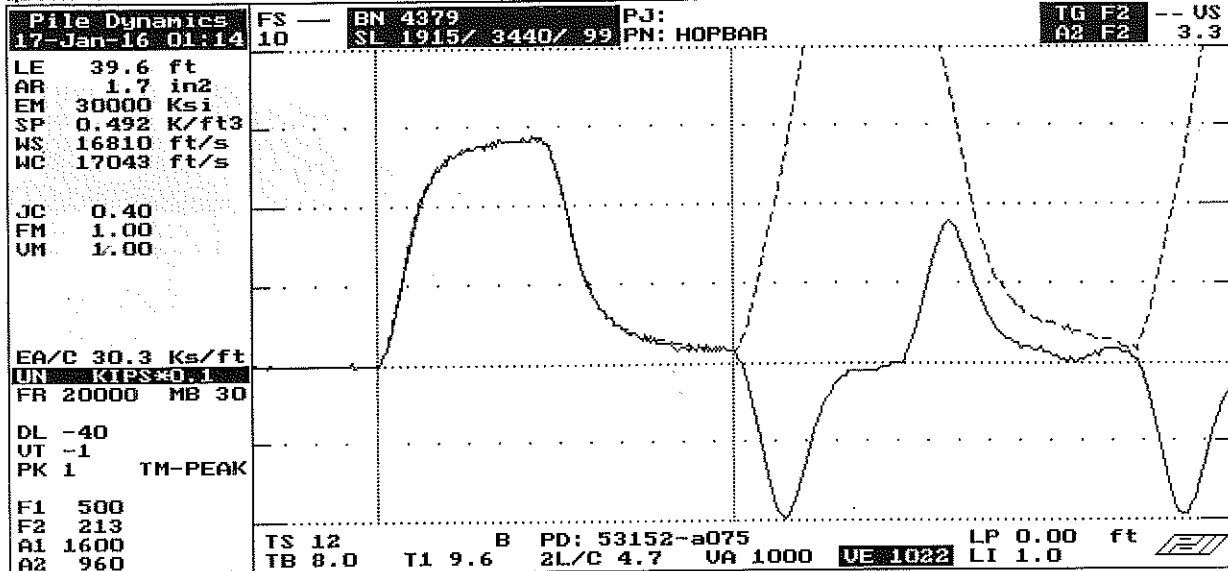

ACCEPT SQ-OFF FL-OFF PR-OFF



contact Pile Dynamics USA
 with your questions
 tel USA - 216 - 831- 6131
 fax USA - 216 - 831- 0916

UMX= 4.7 FMX= 72 AMX= 159
 EMX= 0.4 MEX= 141 FVP= 0.98

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 53152

CALIBRATION FACTOR: 960 %

PAK (*5000): DATE: 21JAN16

PDA OPERATOR: [Signature]

<-AT:PIEZORESISTIVE

OP: laine [ver:4.05]

AT:PIEZOELECTRIC->

Smart Sensor

Smart Chip Programmed By J.M.W. on 21JAN16 CRC Value A32A