

QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

File Dynamics
2018-06-03 06:59

FS 10

BN 3611
SL 1668/ 3440/ 2

PJ:
PN: HOPBAR

TG F2 -- US
A2 F2 3.3

LE 17.0 ft
AR 1.7 in2
EM 30000 Ksi
SP 0.492 K/ft3
WS 16810 ft/s
WC 7312 ft/s


JC 0.40
FM 1.00
UM 1.00

EA/C 30.3 Ks/ft
UN ~~KIPSEK~~
FR 20000 NB 90

DL -42
UT -1 IP 0.00
PK 1 TM-PEAK


F1 500
F2 213
A1 999
A2 880

TS 12 B PD: 54667-B75 LP 0.00 ft
TB 8.0 T1 9.6 2L/C 4.7 UA 1000 UE 1024 LI 1.0

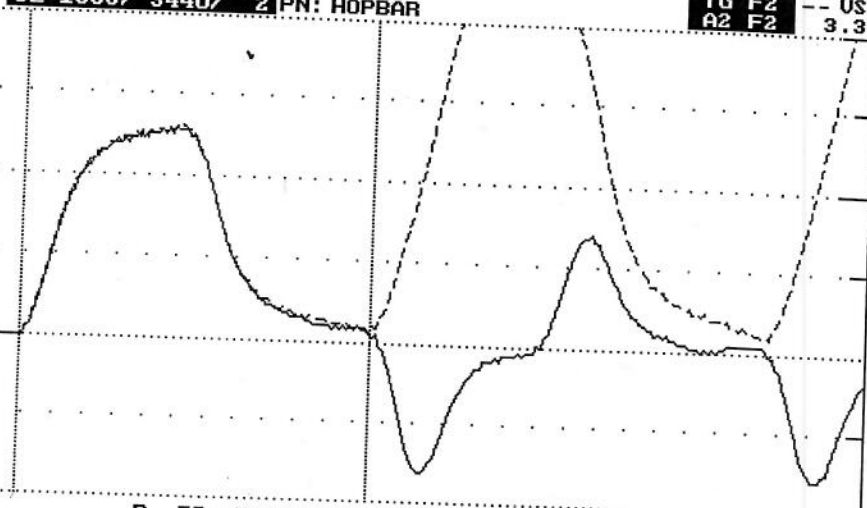

ACCEPT SQ-OFF FL-OFF PR-OFF

UMX= 4.2 FMX= 65 AMX= 129
EMX= 0.3 MEX= 127 FVP= 0.99



ACCELEROMETER CALIBRATION N.I.S.T. Traceable
SERIAL NUMBER: 54667
CALIBRATION FACTOR: 880 %
PAK (*5000): DATE: 5JUNE18
PDA OPERATOR: *[Signature]*

<-AT:PIEZORESISTIVE

OP: Iaine [ver:5.01]

AT:PIEZOELECTRIC->