



QBTA: ON IALT-F1/BB=60J

Pile Dynamics, Inc.

DPF

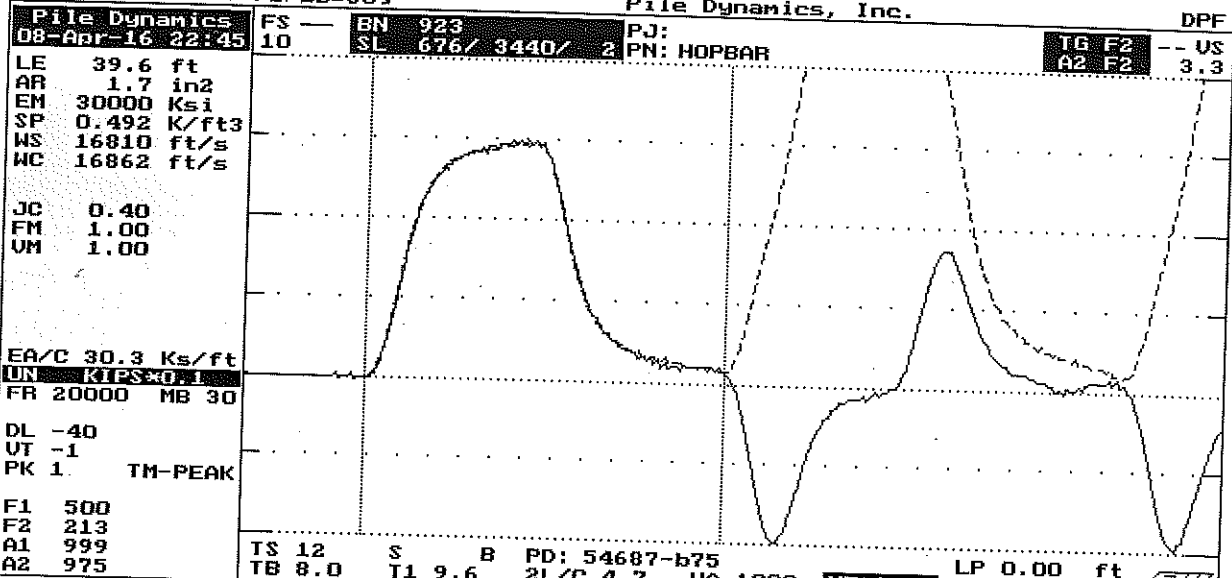

ACCEPT SQ-OFF FL-OFF PR-OFF  contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916 <-AT:PIEZORESISTIVE	UMX= 4.8 FMX= 75 AMX= 149 EMX= 0.3 MEX= 147 FUP= 1.00 ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: 54687 CALIBRATION FACTOR: 975 % PAK (*5000): DATE: 14APR16 PDA OPERATOR: [Signature] OP: Iaine Iver:4.05]
---	---

ATRIELECTRIC

Smart Sensor

Smart Chip Programmed By A.M.W. on 14APR16 CRC Value 5EAE