



QBTA: DN [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

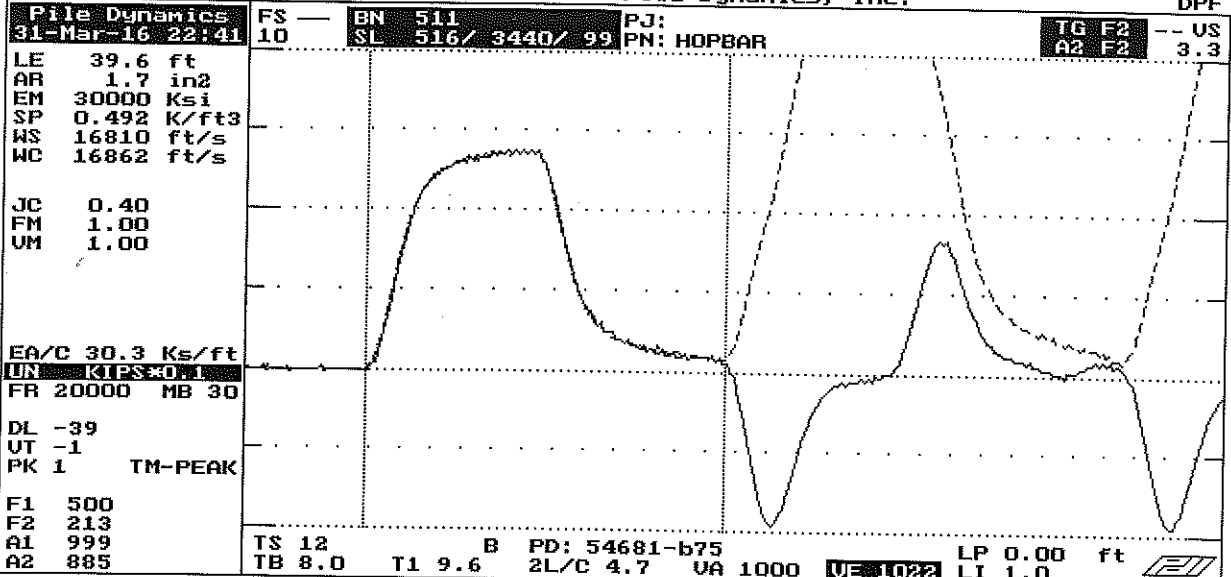

 <p>contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916</p>	UM X = 4.5 FMX= 69 AMX= 149 EM X = 0.3 MEX= 135 FUP= 1.01 ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: 54681 CALIBRATION FACTOR: 885 % PAK (*5000): DATE: 6 APR 16 PDA OPERATOR: [Signature] OP: Iaine [ver:4.05]
--	---

<-AT:PIEZORESISTIVE

AT:PIEZOELECTRIC->

Smart Sensor

Smart Chip Programmed By J.M.W. on 6 APR 16 CRC Value E263