


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

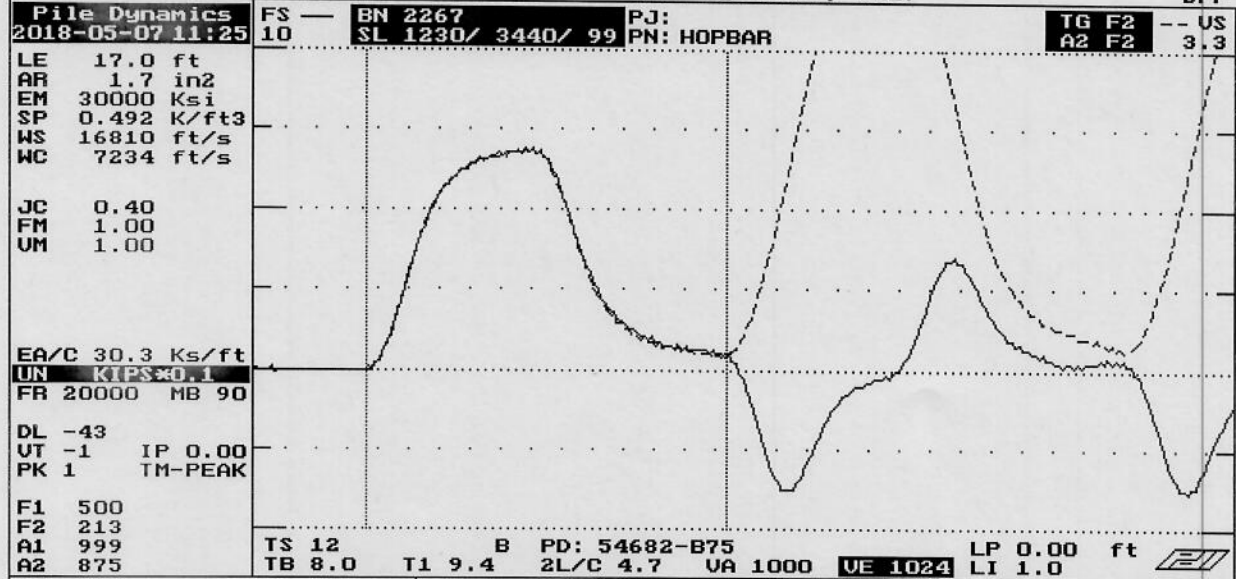

ACCEPT SQ-OFF FL-OFF PR-OFF ACCEPT 	UMX= 4.4 FMX= 69 AMX= 129 EMX= 0.3 MEX= 135 FUP= 1.00 ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: 54682 CALIBRATION FACTOR: 875 % PAK (*5000): DATE: 7 MAY 18 PDA OPERATOR: <i>[Signature]</i>
---	--

<-AT:PIEZORESISTIVE

OP: laine [ver:5.01]

AT:PIEZOELECTRIC->

Smart Sensor

Smart Chip Programmed By A.W. on 7 MAY 18 CRC Value 2DF7