


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

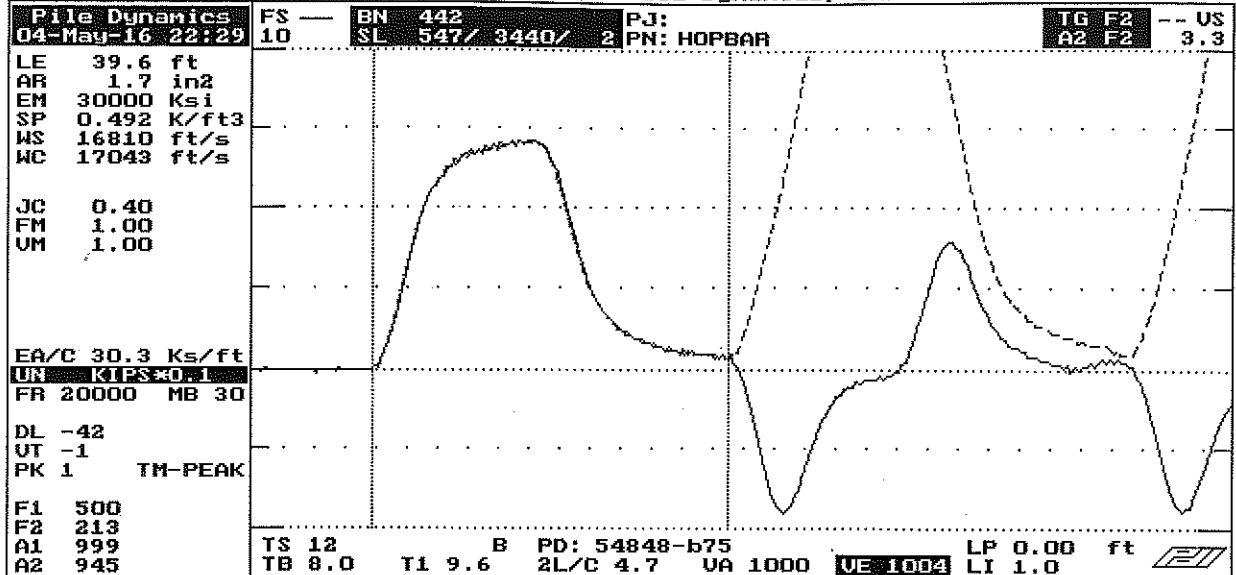

<input type="checkbox"/> ACCEL <input type="checkbox"/> SQ-OFF <input type="checkbox"/> FL-OFF <input type="checkbox"/> PR-OFF	UMX= 4.6 FMX= 72 AMX= 139 EMX= 0.3 MEX= 141 FUP= 1.00 ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: <u>54848</u> CALIBRATION FACTOR: <u>945%</u> PAK (*5000): _____ DATE: <u>5MAY16</u> PDA OPERATOR: <u>[Signature]</u>
---	--

AT:PIEZORESISTIVE OP: Iaine [ver:4.05] AT:PIEZOELECTRIC

Smart Sensor

Smart Chip Programmed By J.M.W. on 5MAY16 CRC Value 0361