


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

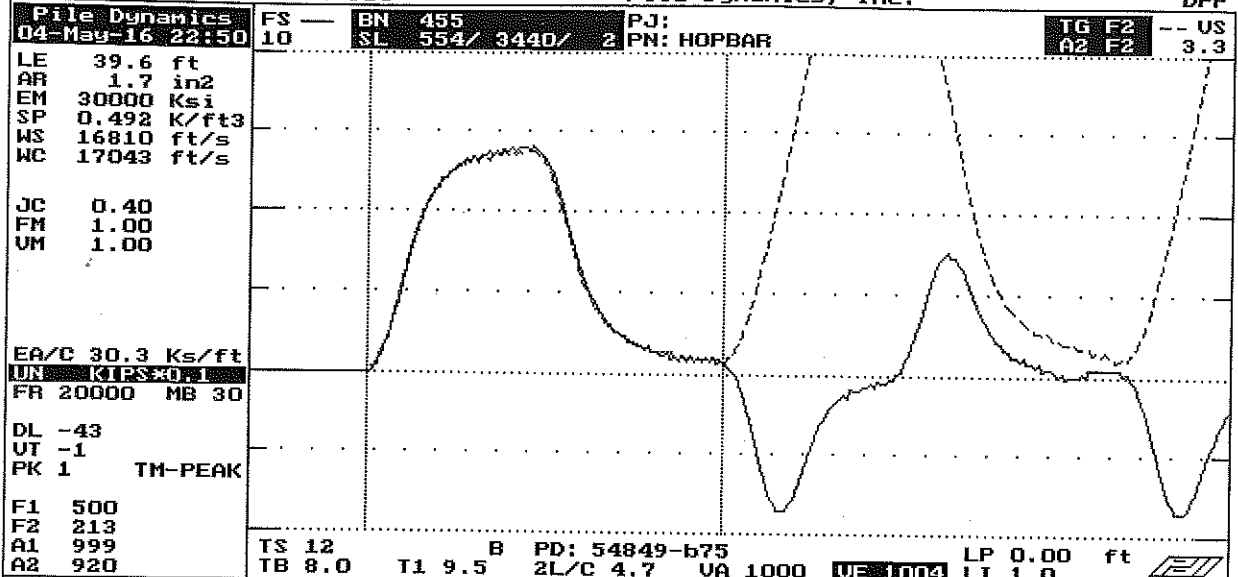

ACCEPT SQ-OFF FL-OFF PR-OFF	UMX= 4.5 FMX= 70 AMX= 139
	EMX= 0.3 MEX= 137 FUP= 1.01
	ACCELEROMETER CALIBRATION N.I.S.T. Traceable
contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916	SERIAL NUMBER: 54849
	CALIBRATION FACTOR: 920%/V
	PAK < *5000 > : _____ DATE: 5MAY16
	PDA OPERATOR: <i>[Signature]</i>
<-AT:PIEZORESISTIVE	OP: Iaine Iver:4.051
	AT:PIEZOELECTRIC->

Smart Sensor

Smart Chip Programmed By A.M.W. on 5MAY16 CRC Value BC07