



QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

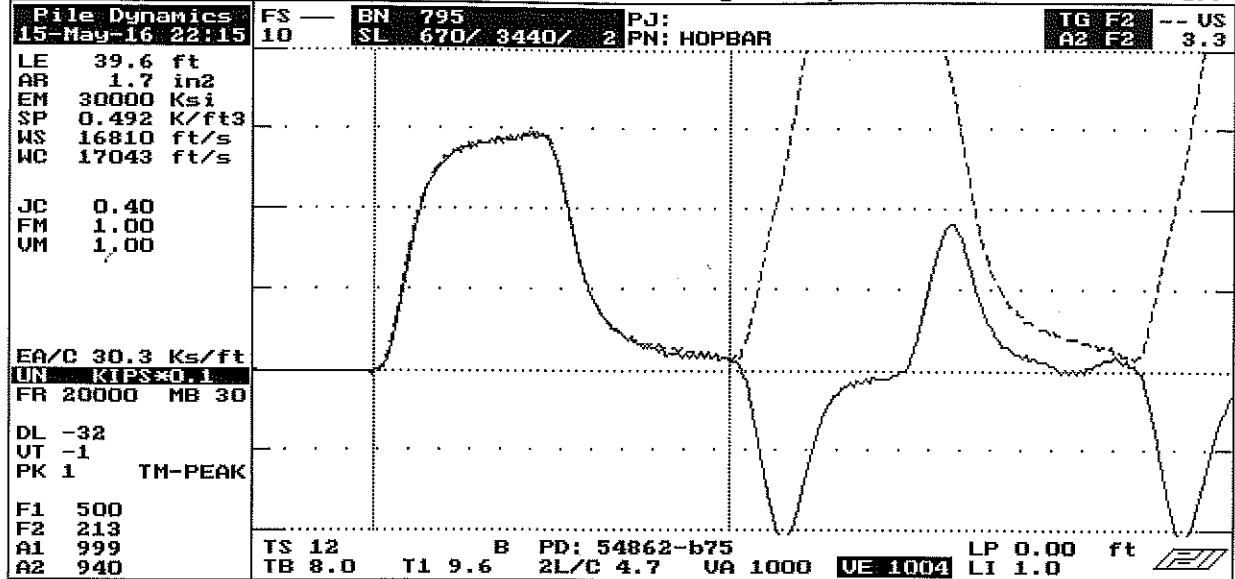

ACCEPT SQ-OFF FL-OFF PR-OFF  contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916	UMX= 4.8 FMX= 74 AMX= 179 EMX= 0.3 MEX= 145 FUP= 1.01 ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: <u>54862</u> CALIBRATION FACTOR: <u>940%</u> PAK (*5000): _____ DATE: <u>16 MAY 16</u> PDA OPERATOR: <u>[Signature]</u>
---	---

<-AT:PIEZORESISTIVE

OP: laine Iver:4.05]

AT:PIEZOELECTRIC->