


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

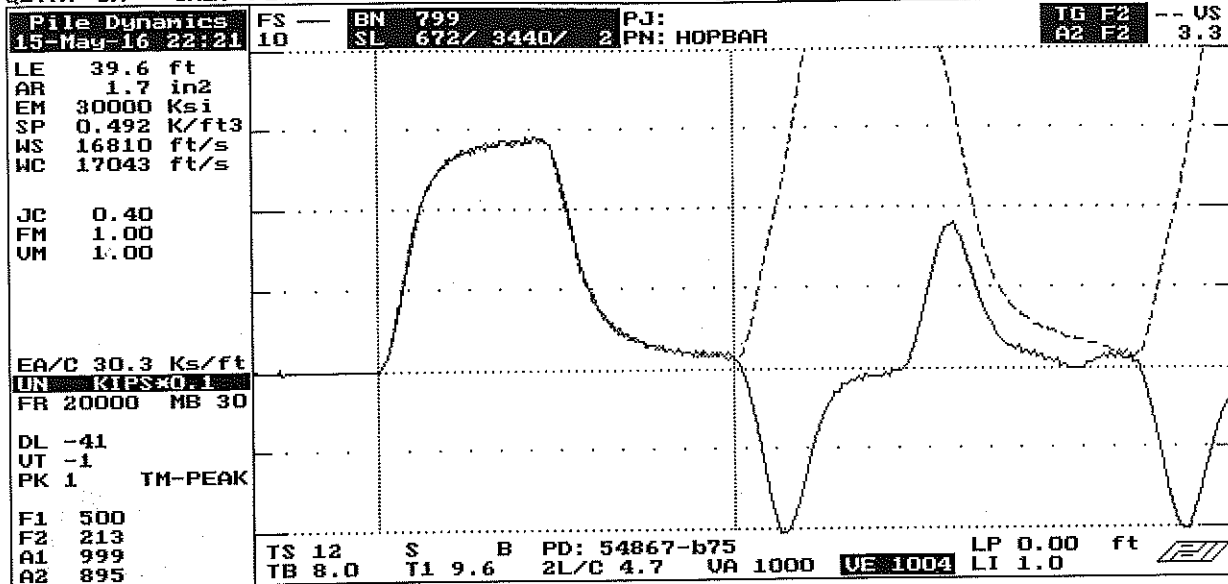

ACCEPT SQ-OFF FL-OFF PR-OFF



contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

UMX= 4.7 FMX= 73 AMX= 159
EMX= 0.3 MEX= 143 FUP= 1.01

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 54867

CALIBRATION FACTOR: 895%/V

PAK (<#0007): DATE: 16MAY16

PDA OPERATOR: JMS

<-AT:PIEZORESISTIVE

OP: Iaine Iver:4.051

AT:PIEZOELECTRIC->

Smart Sensor

Smart Chip Programmed By J.M.W. on 16 MAY 16 CRC Value 0651