


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

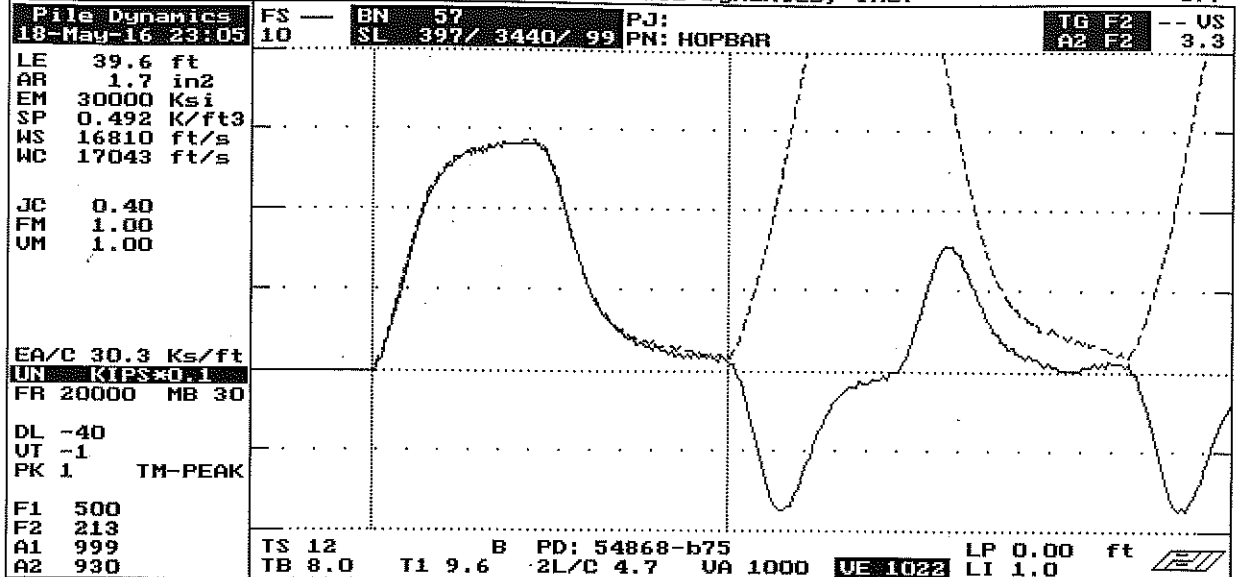

ACCEPT SQ-OFF FL-OFF PR-OFF	UMX= 4.7	FMX= 72	AMX= 139
	EMX= 0.3	MEX= 141	FVP= 0.99
	ACCELEROMETER CALIBRATION N.I.S.T. Traceable		
contact File Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916	SERIAL NUMBER: 54868	DATE: 19MAY16	
	CALIBRATION FACTOR: 930%	PAK (*5000):	
	PDA OPERATOR: <i>[Signature]</i>		
<-AT:PIEZORESISTIVE	OP: laine [ver:4.05]	AT:PIEZOELECTRIC->	

Smart Sensor

Smart Chip Programmed By J.M.W. on 19MAY16 CRC Value C604