



QBTA: ON [ALT-F1/BB=60]

File Dynamics, Inc.

DPF

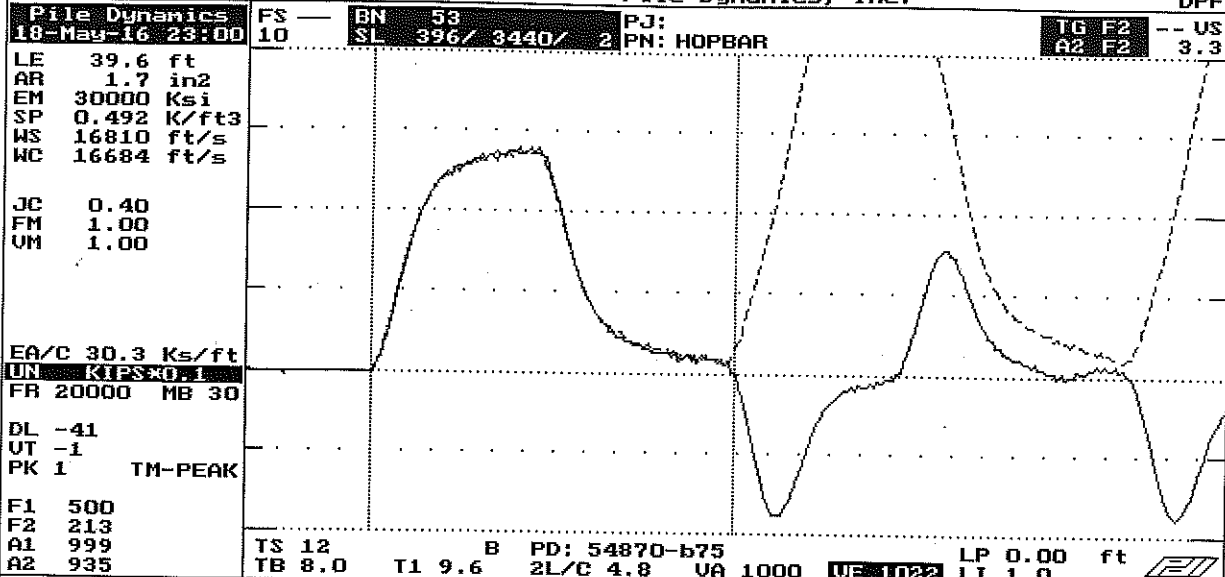

ACCEPT SQ-OFF FL-OFF PR-OFF  contact File Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916 ←-AT:PIEZORESISTIVE	UMX= 4.5 FMX= 70 AMX= 139 EMX= 0.3 MEX= 137 FUP= 1.01 ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: 54870 CALIBRATION FACTOR: 935 %/V PAK (*5000): DATE: 19MAY16 PDA OPERATOR: <i>[Signature]</i> OP: laine [ver:4.05]
--	---

AT:PIEZOELECTRIC

Smart Sensor

Smart Chip Programmed By D.M.W. on 19MAY16 CRC Value SF65