


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

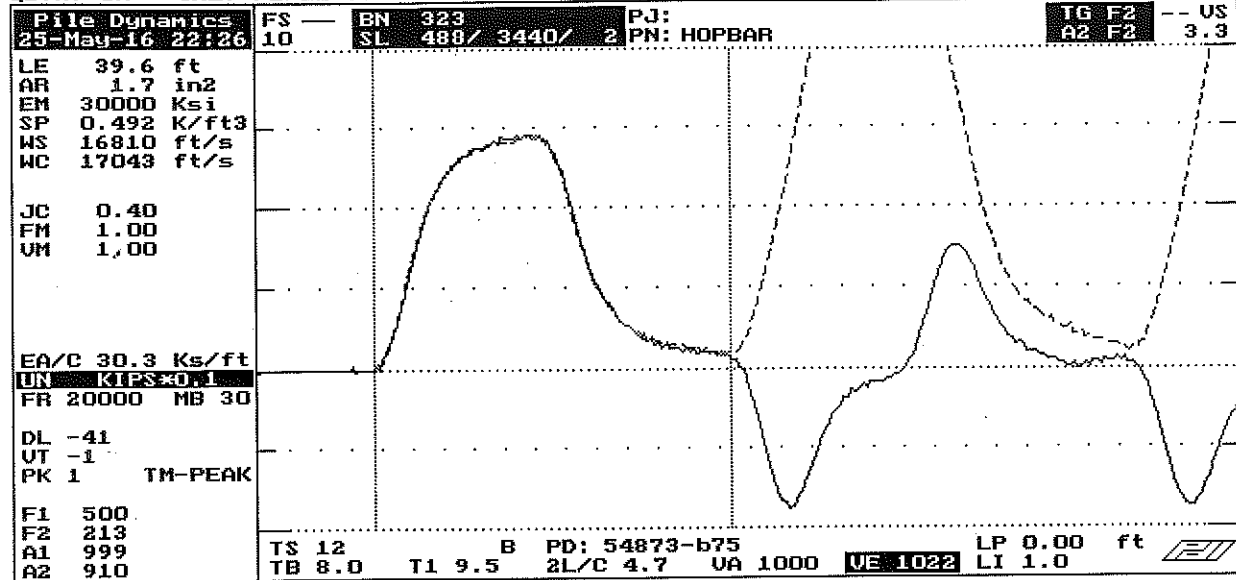

ACCEPT SQ-OFF FL-OFF PR-OFF	UMX= 4.7	FMX= 73	AMX= 139
	EMX= 0.3	MEX= 143	FVP= 1.01
	ACCELEROMETER CALIBRATION N.I.S.T. Traceable		
	SERIAL NUMBER:	54873	
	CALIBRATION FACTOR:	910%	
	PAK (*5000):	DATE:	
	PDA OPERATOR:	<i>[Signature]</i>	
<-AT:PIEZORESISTIVE	OP: laine [ver:4.05]	[AT:PIEZOELECTRIC->	

Smart Sensor

Smart Chip Programmed By Z.M.W. on _____ CRC Value 54BC