


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

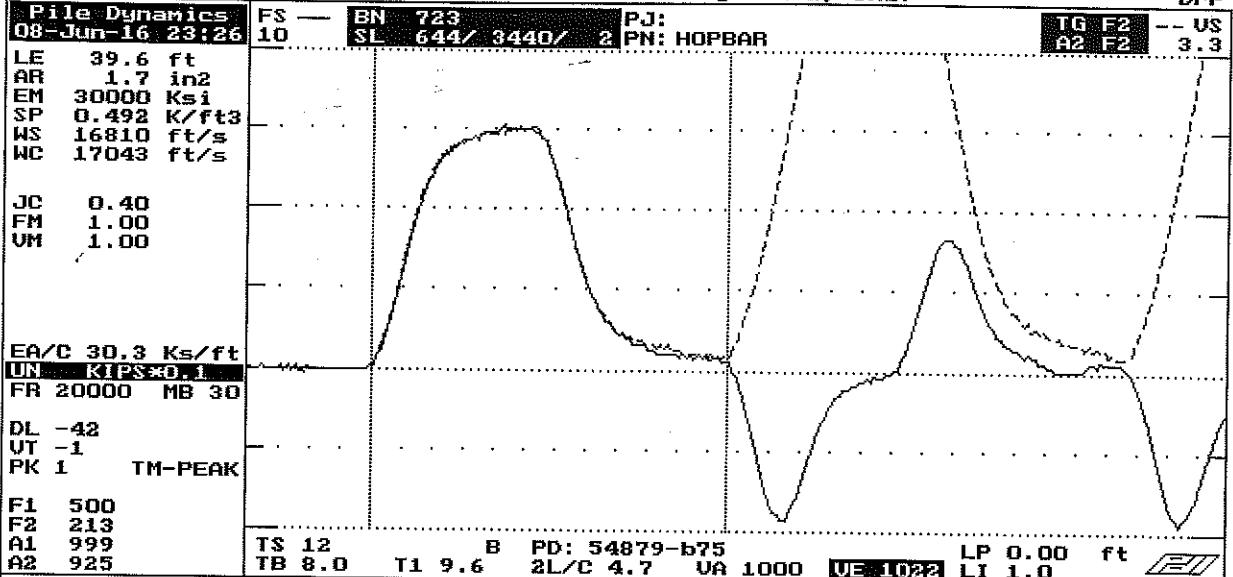

<input type="checkbox"/> ACCEPT <input type="checkbox"/> SQ-OFF <input type="checkbox"/> FL-OFF <input type="checkbox"/> PR-OFF		UMX= 4.9	FMX= 76	AMX= 149
		EMX= 0.3	MEX= 149	FUP= 0.99
<p>contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916</p>		ACCELEROMETER CALIBRATION N.I.S.T. Traceable		
		SERIAL NUMBER: 54879		
		CALIBRATION FACTOR: 925%		
		PAK (*5000):		DATE: 9 JUNE 16
PDA OPERATOR: <i>aa</i>				
←-AT:PIEZORESISTIVE		OP: laine [ver:4.05]		→-AT:PIEZOELECTRIC-