



QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

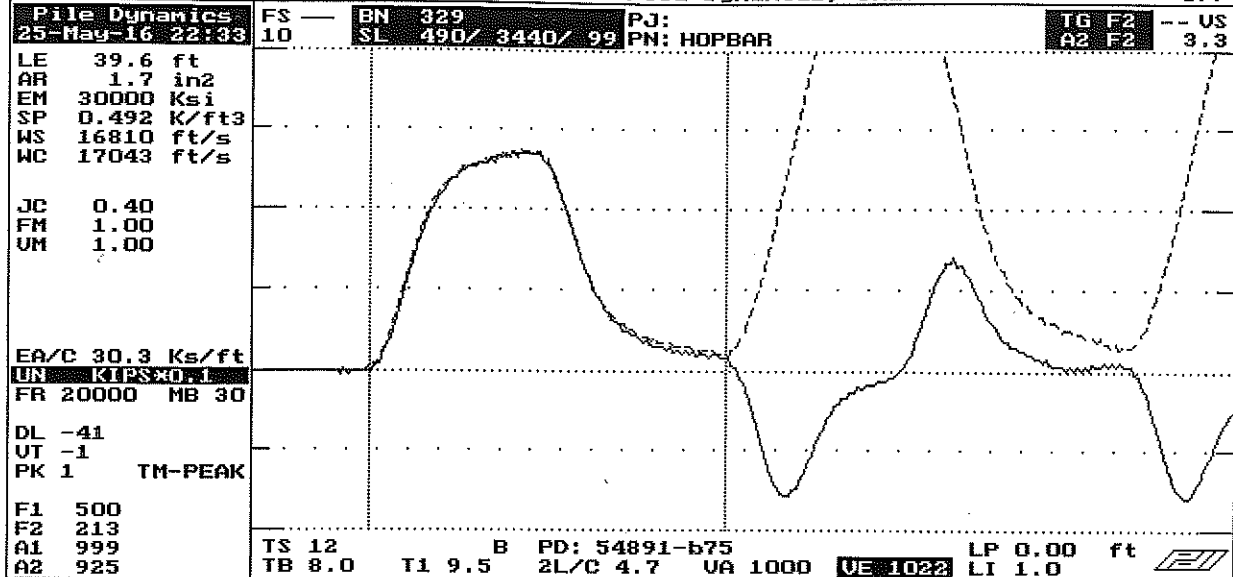

ACCEPT SQ-OFF FL-OFF PR-OFF  contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916	UMX= 4.4 FMX= 68 AMX= 129 EMX= 0.3 MEX= 133 FUP= 1.00 ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: 54891 CALIBRATION FACTOR: 925 G/V PAK (5000): _____ DATE: _____ PDA OPERATOR: <i>[Signature]</i> OP: laine [ver:4.05]
--	--

Smart Sensor

Smart Chip Programmed By A.M.W. on _____ CRC Value 9A00