


QBTA: ON IALT-F1/BB=601

Pile Dynamics, Inc.

DPF

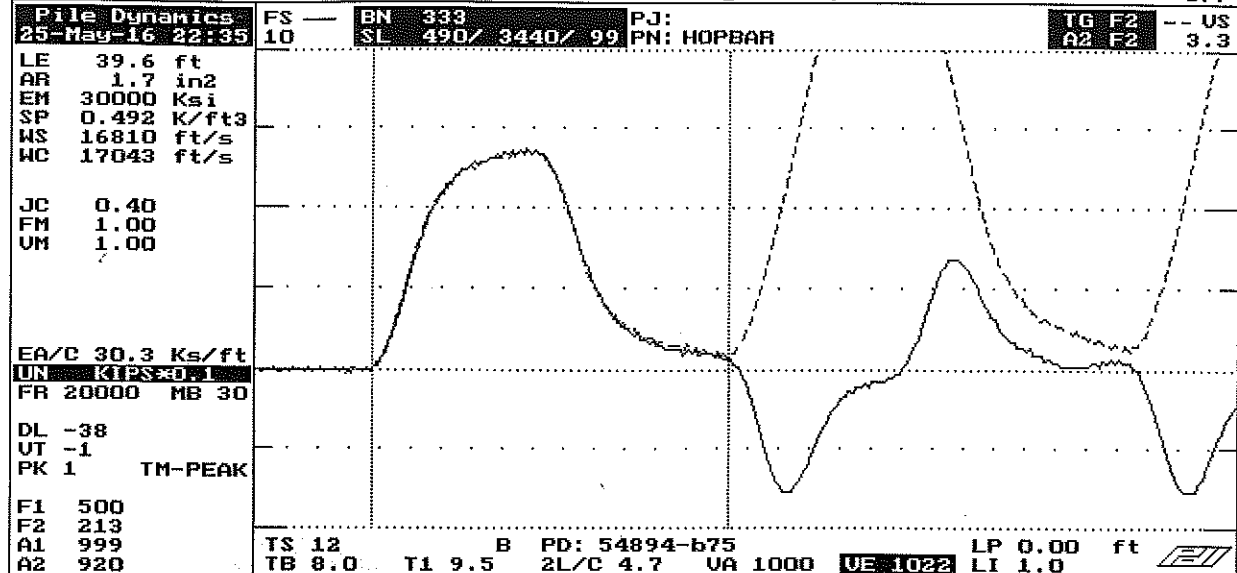

ACCEPT SQ-OFF FL-OFF PR-OFF	VMX= 4.4	FMX= 69	AMX= 129
	EMX= 0.3	MEX= 135	FVP= 1.00

<p>contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916</p>	ACCELEROMETER CALIBRATION	N.I.S.T. Traceable
	SERIAL NUMBER:	54894
	CALIBRATION FACTOR:	920%
	PAK (*5000):	DATE:

←-AT:PIEZORESISTIVE OP: laine [ver:4.05] AT:PIEZOELECTRIC-→

Smart Sensor

Smart Chip Programmed By A.M.W. on \_\_\_\_\_ CRC Value 3E06