


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

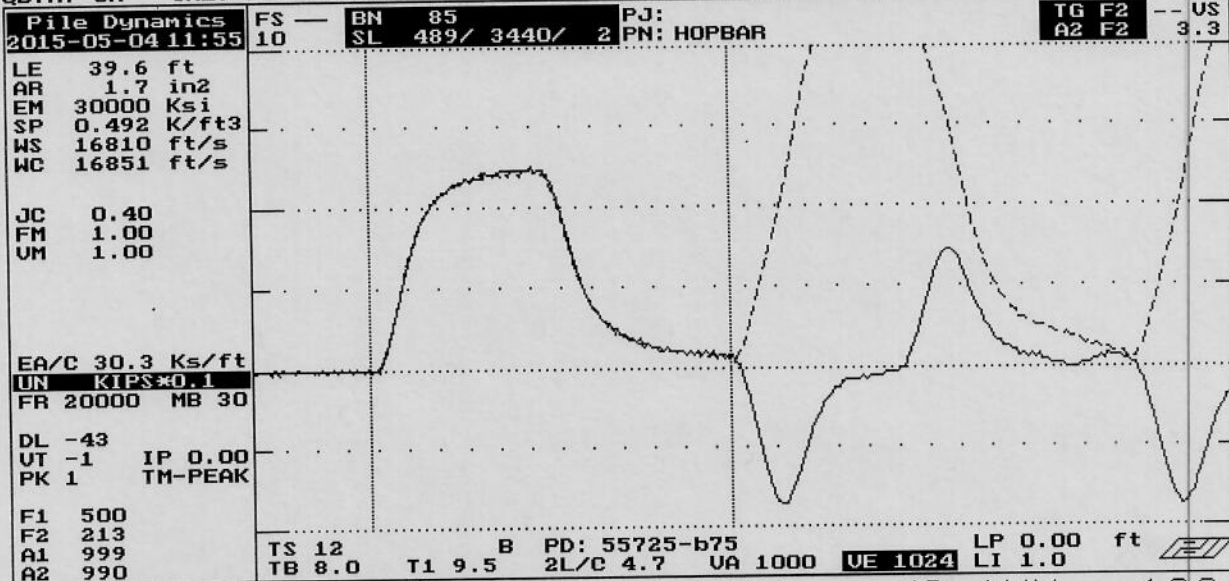

ACCEPT SQ-OFF FL-OFF PR-OFF  ACCEPT 	VMX= 4.0 FMX= 63 AMX= 129 EMX= 0.2 MEX= 123 FVP= 1.00 ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: 55725 CALIBRATION FACTOR: 990 % PAK (*5000): _____ DATE: 17JAN18 PDA OPERATOR: <i>[Signature]</i>
---	---

←-AT:PIEZORESISTIVE OP: laine [ver:5.01] AT:PIEZOELECTRIC->

Smart Sensor

Smart Chip Programmed By R.M.W. on 17JAN18 CRC Value 2CBA