


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

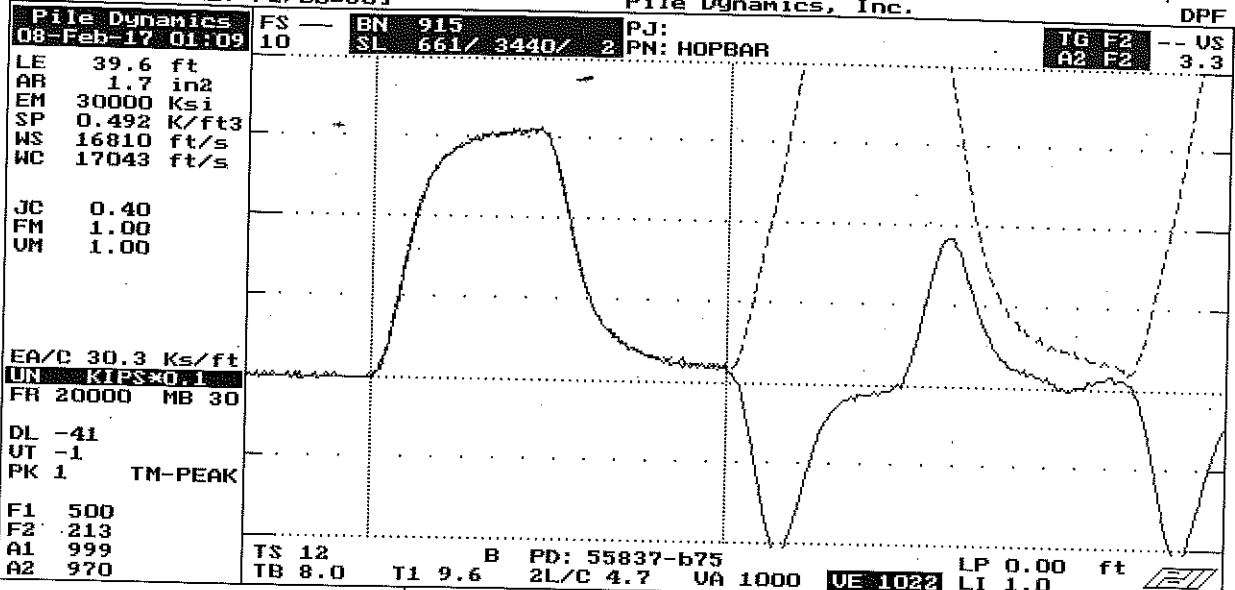

ACCEPT SQ-OFF FL-OFF PR-OFF  contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916 <-AT:PIEZORESISTIVE	VMX= 5.0 FMX= 78 AMX= 159 EMX= 0.4 MEX= 152 FUP= 1.00 ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: 55837 CALIBRATION FACTOR: 970 gV PAK (*5000): DATE: 10FEB17 PDA OPERATOR: [Signature] OP: laine [ver:4.05]	AT:PIEZOELECTRIC->
--	---	--------------------

Smart Sensor

Smart Chip Programmed By J.M.W. on 10FEB17 CRC Value 55F4