

QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

File Dynamics
 08-Feb-17 01:18
 LE 39.6 ft
 AR 1.7 in2
 EM 30000 Ksi
 SP 0.492 K/ft3
 WS 16810 ft/s
 WC 17043 ft/s

FS — BN 932
 10 SL 663/ 3440/ 99

PJ:
 PN: HOPBAR


TG F2 — US
 A2 F2 3.3

JC 0.40
 FM 1.00
 VM 1.00

EA/C 30.3 Ks/ft
 UN KIPS*0.1
 FR 20000 MB 30

DL -40
 UT -1
 PK 1 TM-PEAK


F1 500
 F2 213
 A1 999
 A2 955

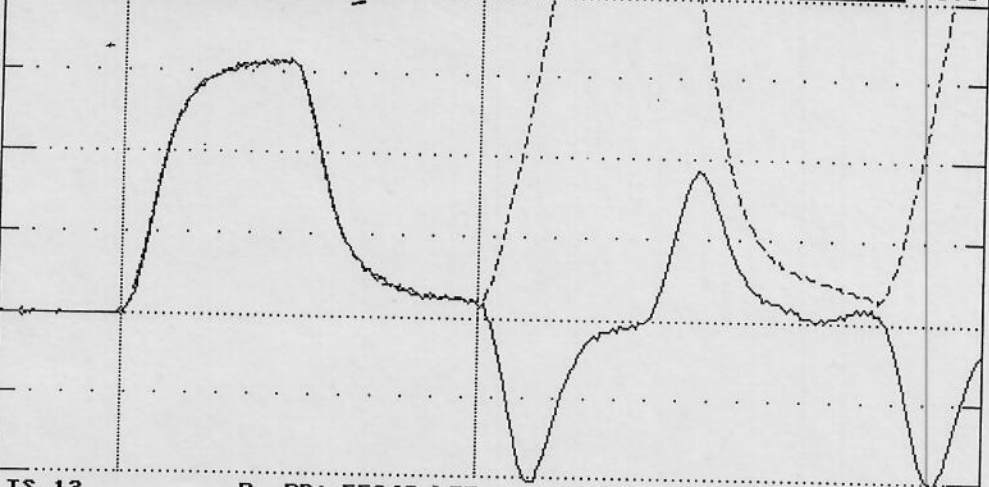

TS 12 B PD: 55840-b75 LP 0.00 ft
 TB 8.0 T1 9.6 2L/C 4.7 UA 1000 UE 1022 LI 1.0

ACCEPT SQ-OFF FL-OFF PR-OFF

VMX= 5.2 FMX= 79 AMX= 159
 EMX= 0.4 MEX= 154 FUP= 1.00



contact Pile Dynamics USA
 with your questions
 tel USA - 216 - 831- 6131
 fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable
 SERIAL NUMBER: 55840
 CALIBRATION FACTOR: 955 %
 PAK (*5000): DATE: 9 APR 18
 PDA OPERATOR: *[Signature]*

<-AT:PIEZORESISTIVE

OP: laine [ver:4.05]

AT:PIEZOELECTRIC->

Smart Sensor

Smart Chip Programmed By J.M.W. on 9 APR 18 CRC Value 9E0B