


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

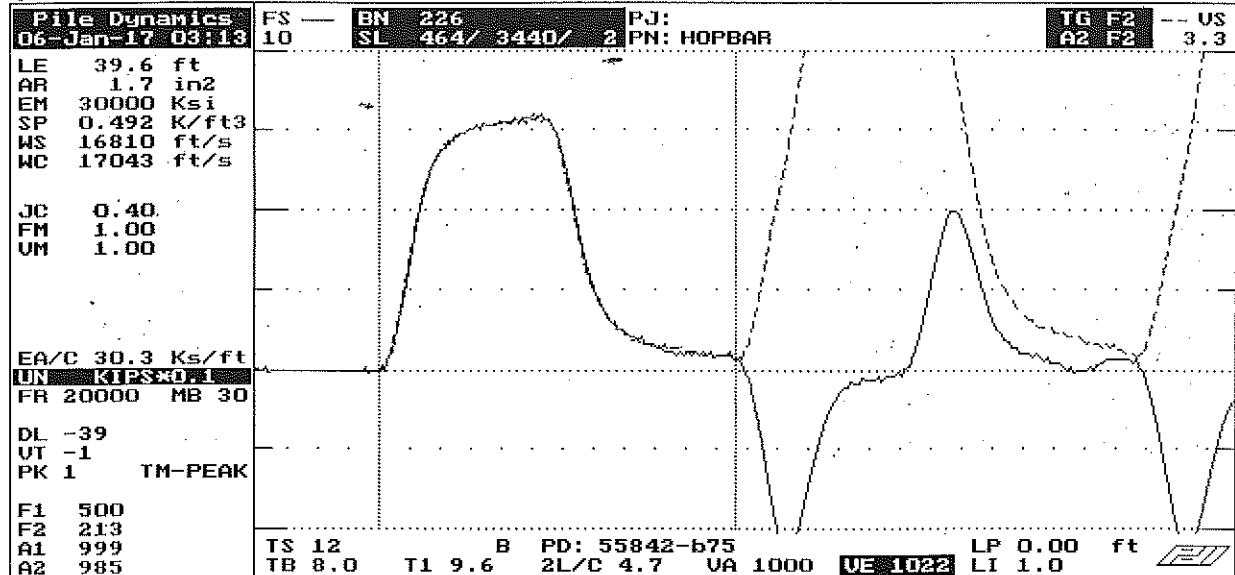

<p>contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916</p>	<p>UMX= 5.1 FMX= 80 AMX= 169 EMX= 0.4 MEX= 156 FVP= 1.01</p> <p>ACCELEROMETER CALIBRATION N.I.S.T. Traceable</p> <p>SERIAL NUMBER: <u>55842</u></p> <p>CALIBRATION FACTOR: <u>985%</u></p> <p>PAK (*5000): _____ DATE: <u>6JAN17</u></p> <p>PDA OPERATOR: <u>[Signature]</u></p>
<p>←-AT:PIEZORESISTIVE</p>	<p>OP: laine [ver:4.05] AT:PIEZOELECTRIC→</p>

Smart Sensor

Smart Chip Programmed By J.M.W. on 6JAN17 CRC Value A000