


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

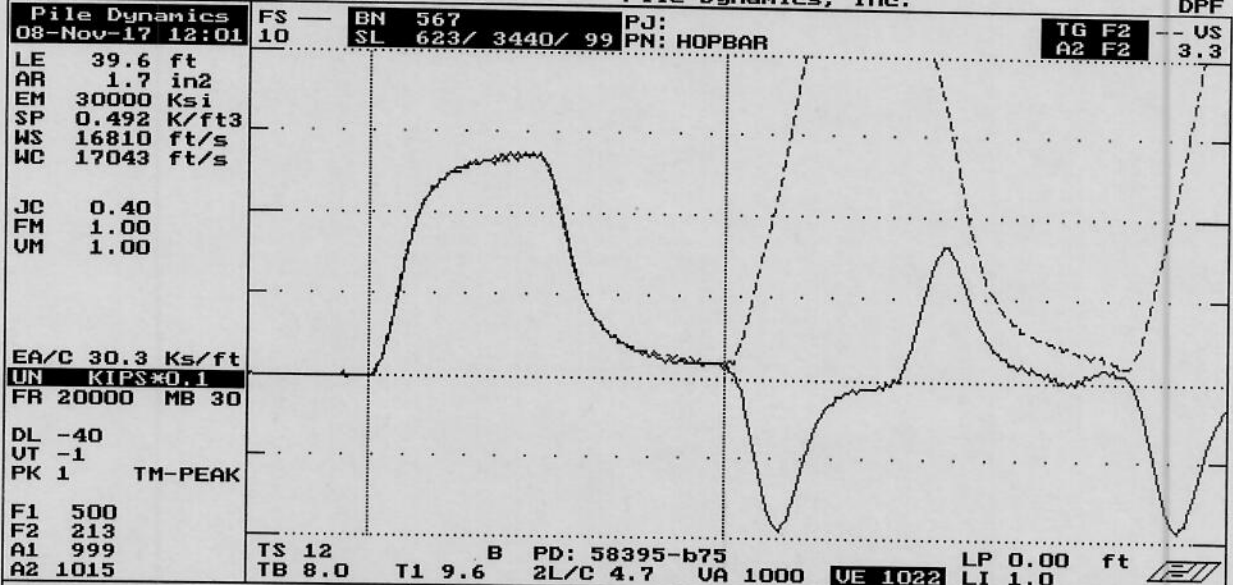

UMX= 4.4 FMX= 69 AMX= 149
 EMX= 0.3 MEX= 135 FUP= 1.00

ACCEPT SQ-OFF FL-OFF PR-OFF

contact Pile Dynamics USA
 with your questions
 tel USA - 216 - 831- 6131
 fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable
 SERIAL NUMBER: 58395
 CALIBRATION FACTOR: 1015 G/V
 PAK (*5000): DATE: 8/NOV17
 PDA OPERATOR: *[Signature]*

<-AT:PIEZORESISTIVE

OP: laine [ver:4.05]

AT:PIEZOELECTRIC->

Smart Sensor

Smart Chip Programmed By J.M.W. on 8/NOV17 CRC Value DC11