


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

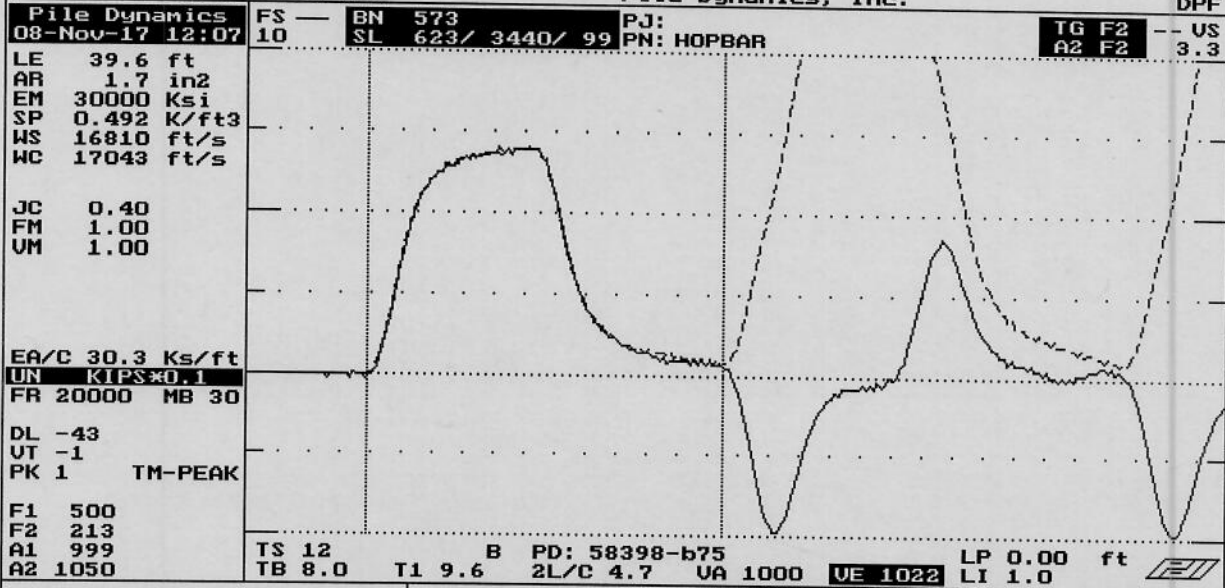

ACCEPT SQ-OFF FL-OFF PR-OFF contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916	VMX= 4.6 FMX= 71 AMX= 149 EMX= 0.3 MEX= 139 FVP= 1.00 ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: 58398 CALIBRATION FACTOR: 1050 % PAK (<*5000>): DATE: 8 NOV 17 PDA OPERATOR: <i>[Signature]</i>
---	---

<-AT:PIEZORESISTIVE OP: laine [ver:4.05] AT:PIEZOELECTRIC->

Smart Sensor

Smart Chip Programmed By J.M.W. on 8 NOV 17 CRC Value 619B