


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

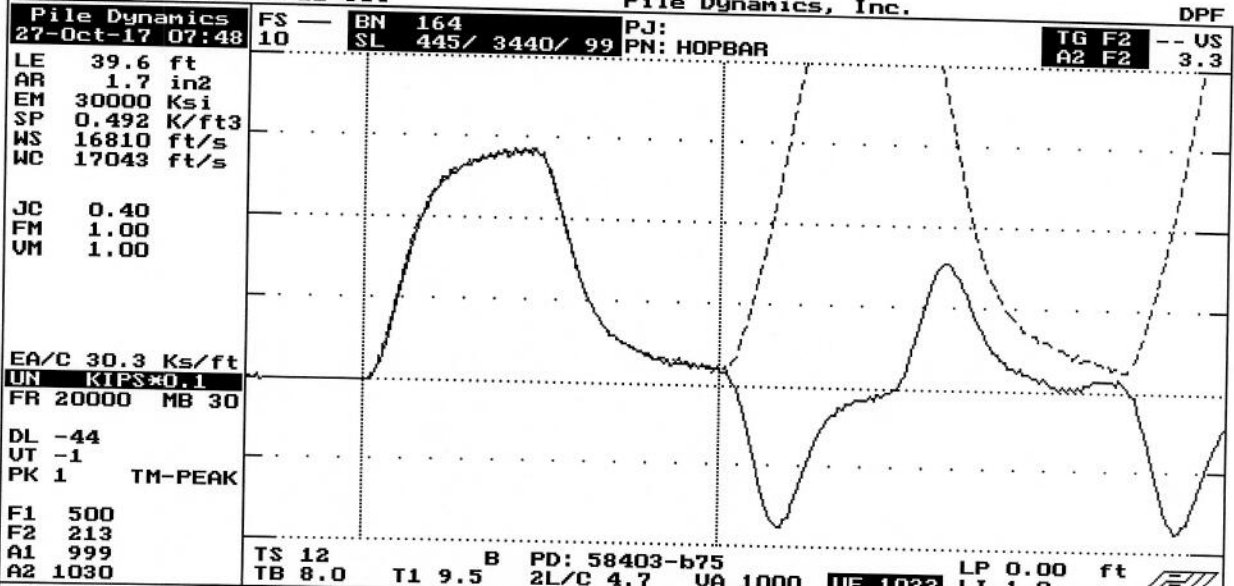

ACCEPT SQ-OFF FL-OFF PR-OFF



contact Pile Dynamics USA  
 with your questions  
 tel USA - 216 - 831- 6131  
 fax USA - 216 - 831- 0916

UMX= 4.6 FMX= 72 AMX= 139  
 EMX= 0.3 MEX= 141 FVP= 0.99

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 58403

CALIBRATION FACTOR: 1030 %

PAK <{\*5000}>: DATE: 27OCT17

PDA OPERATOR: *laine*

<-AT:PIEZORESISTIVE

OP: laine [ver:4.05]

AT:PIEZOELECTRIC->