

QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

Pile Dynamics
27-Oct-17 07:45

FS —
10

BN 161
SL 445/ 3440/ 99

PJ:
PN: HOPBAR

TG F2 -- US
A2 F2 3.3

LE 39.6 ft
AR 1.7 in2
EM 30000 Ksi
SP 0.492 K/ft3
WS 16810 ft/s
WC 17043 ft/s


JC 0.40
FM 1.00
UM 1.00

EA/C 30.3 Ks/ft
UN KIPS*0.1
FR 20000 MB 30


DL -40
UT -1
PK 1 TM-PEAK

F1 500
F2 213
A1 999
A2 1030

TS 12 B PD: 58404-b75 LP 0.00 ft
TB 8.0 T1 9.6 2L/C 4.7 UA 1000 UE 1022 LI 1.0

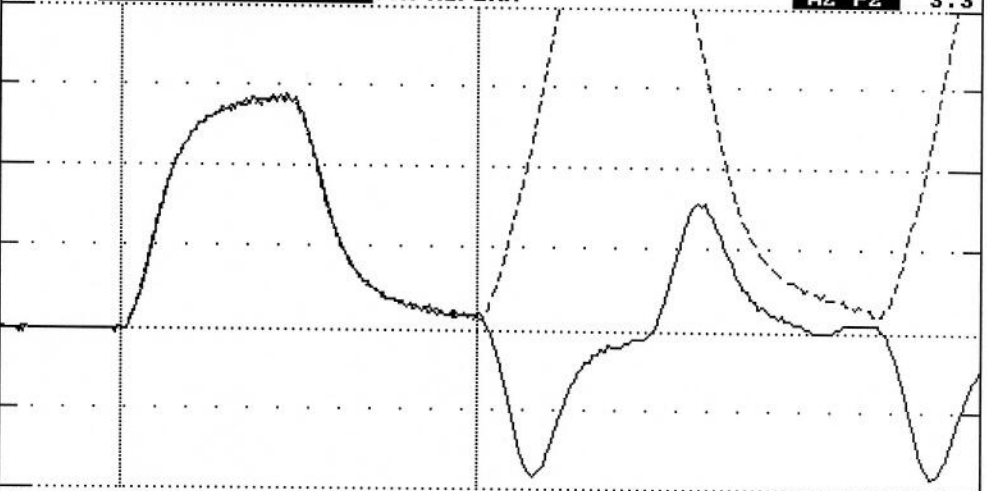

ACCEPT SQ-OFF FL-OFF PR-OFF



contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

VMX= 4.6 FMX= 72 AMX= 139
EMX= 0.3 MEX= 141 FUP= 1.01

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 58404 HAMMER

CALIBRATION FACTOR: 1030 gV

PAK (*5000): DATE: 27OCT17

PDA OPERATOR: [Signature]

<-AT:PIEZORESISTIVE

OP: laine [ver:4.05]

AT:PIEZOELECTRIC->