


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

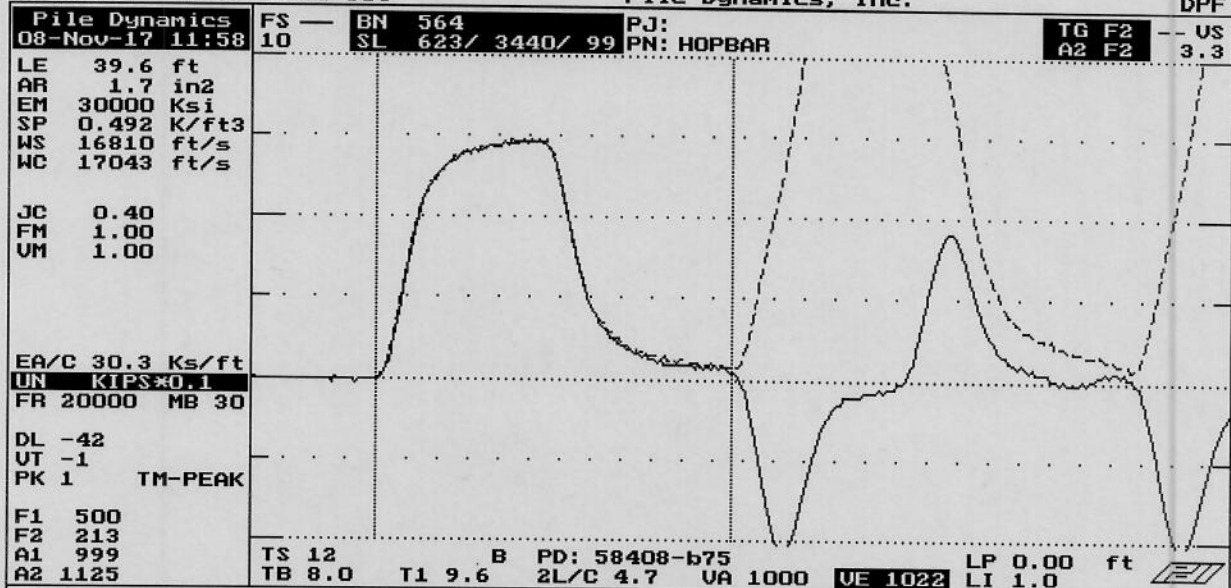

ACCEPT SQ-OFF FL-OFF PR-OFF
 UMX= 4.8 FMX= 74 AMX= 159
 EMX= 0.3 MEX= 145 FVP= 1.01



contact Pile Dynamics USA
 with your questions
 tel USA - 216 - 831- 6131
 fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 58408

CALIBRATION FACTOR: 1125 g/v

PAK (*5000): DATE: 8/NOV/17

PDA OPERATOR: [Signature]

<-AT:PIEZORESISTIVE

OP: Iaine Iver:4.051

AT:PIEZOELECTRIC->

Smart Sensor

Smart Chip Programmed By J.M.W. on 8/NOV/17 CRC Value 0038