


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

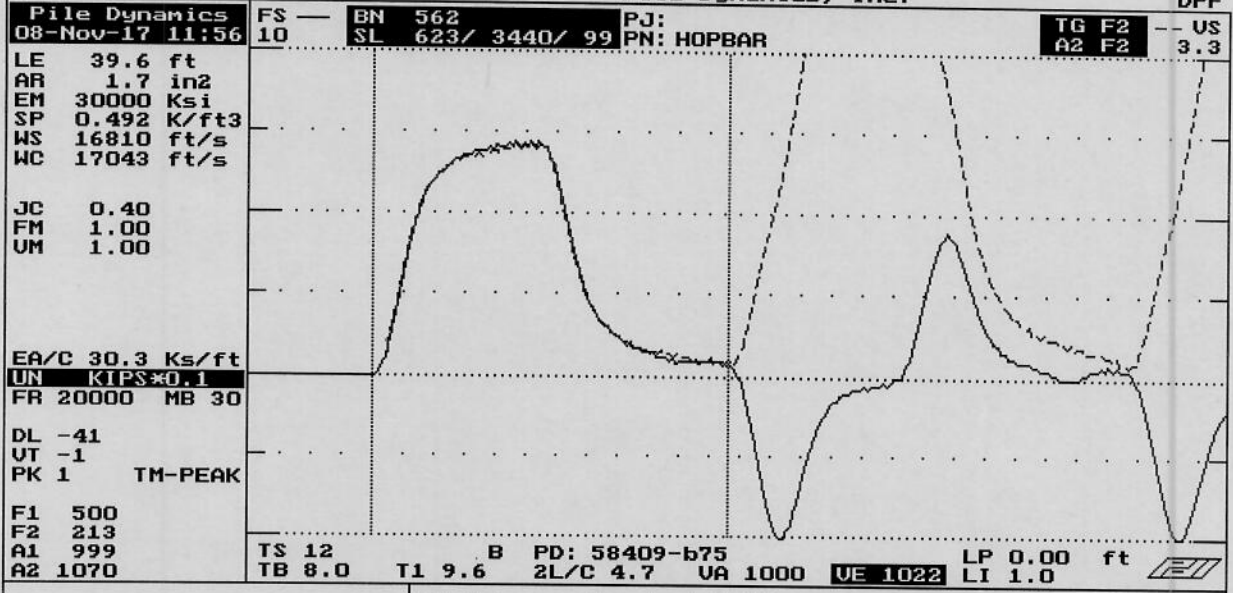

ACCEPT SQ-OFF FL-OFF PR-OFF	VMX= 4.6 FMX= 72 AMX= 149
	EMX= 0.3 MEX= 141 FVP= 1.01
	ACCELEROMETER CALIBRATION N.I.S.T. Traceable
contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916	SERIAL NUMBER: 58409
	CALIBRATION FACTOR: 1070 %/V
	PAK (*5000): DATE: 8 NOV 17
	PDA OPERATOR: <i>[Signature]</i>
<-AT:PIEZORESISTIVE	OP: laine [ver:4.05]
	AT:PIEZOELECTRIC->

Smart Sensor

Smart Chip Programmed By J.M.W. on 8 NOV 17 CRC Value E8B0