



QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

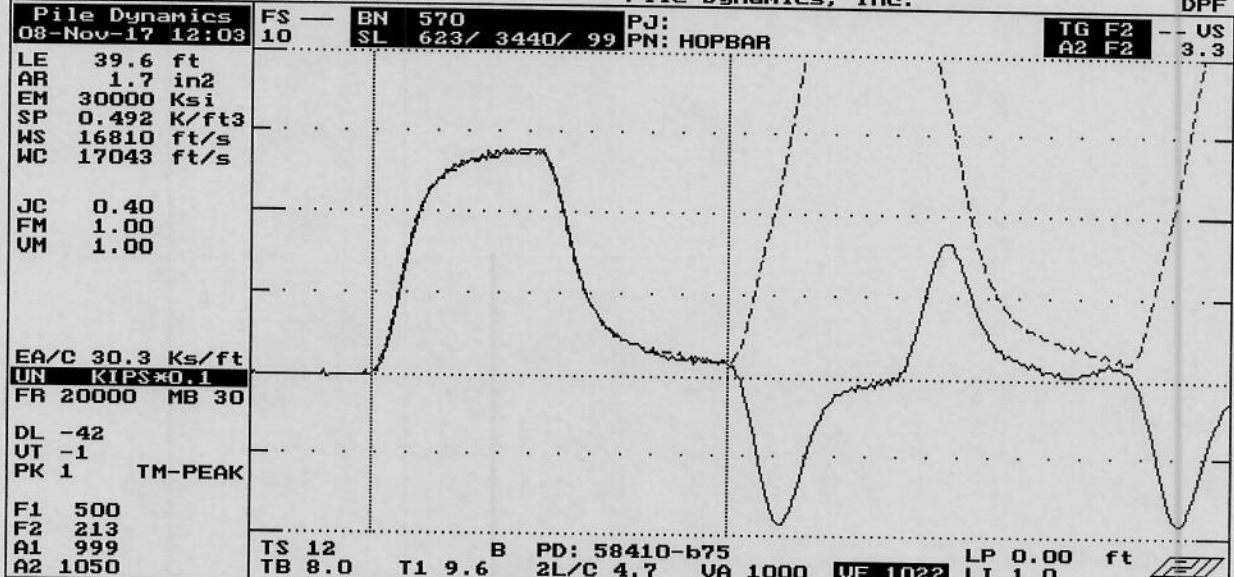

ACCEPT SQ-OFF FL-OFF PR-OFF  contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916	VMX= 4.5 FMX= 70 AMX= 139 EMX= 0.4 MEX= 137 FUP= 1.01 ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: <u>58410</u> CALIBRATION FACTOR: <u>1050 %</u> PAK (*5000): _____ DATE: <u>8NOV17</u> PDA OPERATOR: <u>[Signature]</u> OP: laine [ver:4.05]
--	--

Smart Sensor

Smart Chip Programmed By J.M.W. on 8NOV17 CRC Value 09A2