


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.


DPF

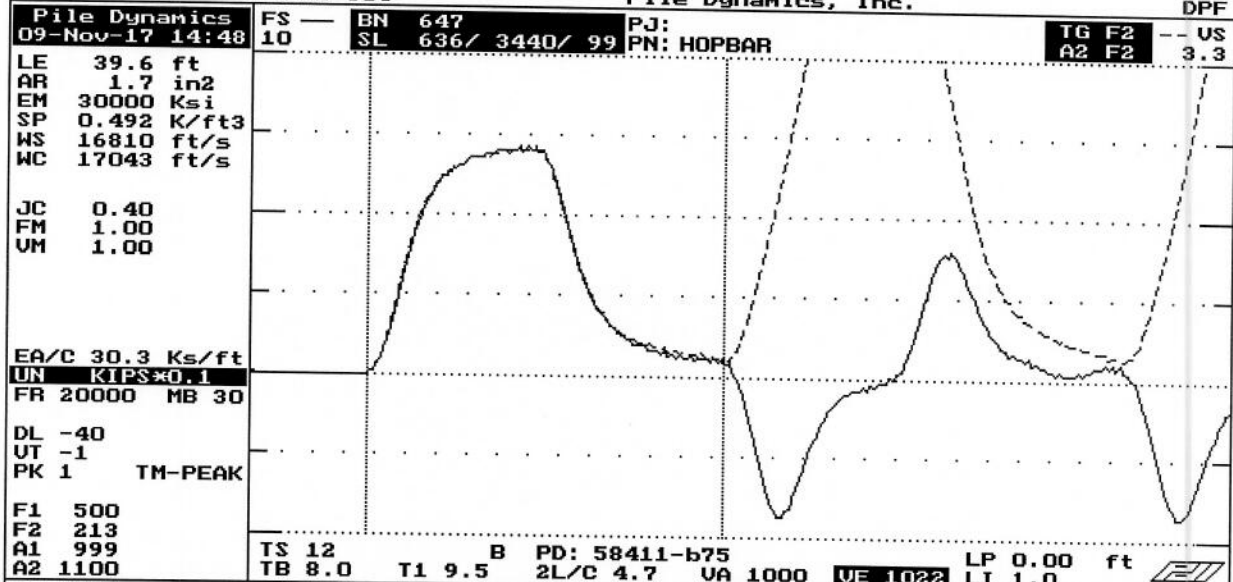

ACCEPT SQ-OFF FL-OFF PR-OFF	UMX= 4.7	FMX= 72	AMX= 139
	EMX= 0.4	MEX= 141	FUP= 1.00

ACCELEROMETER CALIBRATION	N.I.S.T. Traceable
SERIAL NUMBER:	58411
CALIBRATION FACTOR:	1100 %
PAK (*5000):	DATE: 9 NOV 17
PDA OPERATOR:	<i>[Signature]</i>

<-AT:PIEZORESISTIVE OP: laine [ver:4.05] AT:PIEZOELECTRIC->



contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916