

QDATA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

Pile Dynamics
2018-05-11 13:41

FS 10

BN 2563
SL 1363/ 3440/ 2

PJ:
PN: HOPBAR

TG F2 -- US
A2 F2 3.3


LE 17.0 ft
AR 1.7 in2
EM 30000 Ksi
SP 0.492 K/ft3
WS 16810 ft/s
WC 7234 ft/s

JC 0.40
FM 1.00
UM 1.00

EA/C 30.3 Ks/ft
UN KIPS*0.1
FR 20000 MB 90

DL -42
UT -1 IP 0.00
PK 1 TM-PEAK

F1 500
F2 213
A1 999
A2 935

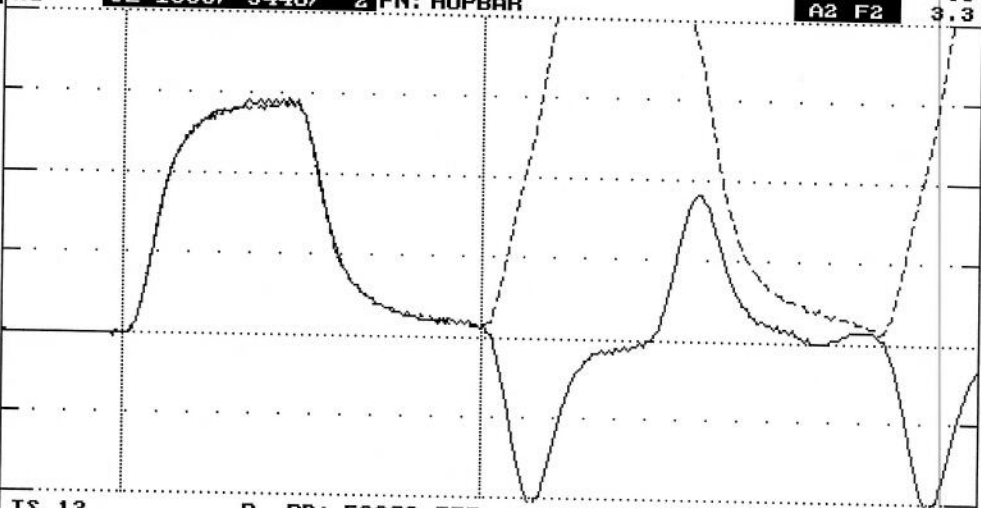


TS 12 B PD: 58808-B75 LP 0.00 ft
TB 8.0 T1 9.6 2L/C 4.7 UA 1000 VE 1024 LI 1.0

ACCEPT SQ-OFF FL-OFF PR-OFF

VMX= 4.7 FMX= 74 AMX= 159
EMX= 0.3 MEX= 145 FUP= 1.01

ACCEPT



ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 58808

CALIBRATION FACTOR: 935 G/V

PAK (*5000): DATE: 11 MAY 18

PDA OPERATOR: [Signature]

<-AT:PIEZORESISTIVE

OP: Iaine [ver:5.01]

AT:PIEZOELECTRIC->