


File Dynamics 28-Dec-06 13:30 LE 39.6 ft AR 1.7 in2 EM 30000 Ksi SP 0.492 K/ft3 MS* 16810 ft/s WC 17418 ft/s CAUTION JC 0.40 FM 1.00 UM 1.00 EA/C 30.3 Ks/ft UN KIPS/ft FR 20000 MB 30 DL -37 UT -1 PK 1 TM-PEAK F1 500 F2 213 A1 999 A2 1020	FS — BN 554 10 SL 2642/ 3440/ 99 PJ: sn PN: HOPBAR TG F2 -- US A2 F2 3.3 TS 12 B PD: a19984 LP 0.00 ft TB 8.0 T1 9.4 2L/C 4.6 UA 1000 UE 1022 LI 1.0
--	--



ACCEPT SQ-OFF FL-OFF PR-OFF

UMX= 4.3 FMX= 67 AMX= 139
 EMX= 0.3 MEX= 131 FUP= 0.98

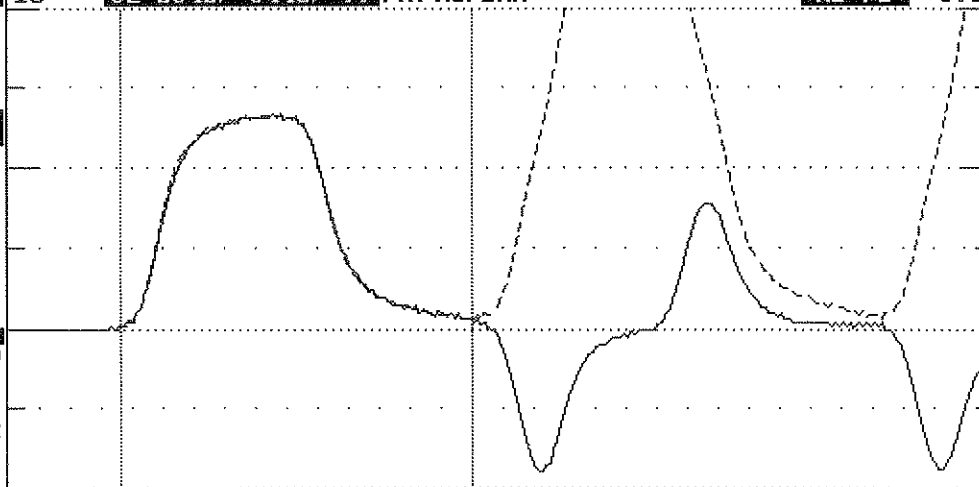

contact Pile Dynamics USA
 with your questions
 tel USA - 216 - 831- 6131
 fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: A19984

CALIBRATION FACTOR: 1020 G/V

PAK (*5000): _____ DATE: 28-DEC-06

PDA OPERATOR: [Signature]