


File Dynamics 28-Dec-06 12:36 LE 39.6 ft AR 1.7 in2 EM 30000 Ksi SP 0.492 K/ft3 WS 16810 ft/s WC 17043 ft/s JC 0.40 FM 1.00 UM 1.00 EA/C 30.3 Ks/ft UN KIPS:0 FR 20000 MB 30 DL -41 UT -1 PK 1 TM-PEAK F1 500 F2 213 A1 999 A2 1020	FS — BN 427 10 SL 2641/ 3440/ 99 PJ: sn PN: HOPBAR TG F2 -- US A2 F2 3.3 TS 12 B PD: a19990 LP 0.00 ft TB 8.0 T1 9.5 2L/C 4.7 UA 1000 UE 1022 LI 1.0
---	---



ACCEPT SQ-OFF FL-OFF PR-OFF

VMX= 4.1 FMX= 64 AMX= 139
 EMX= 0.2 MEX= 125 FUP= 1.00

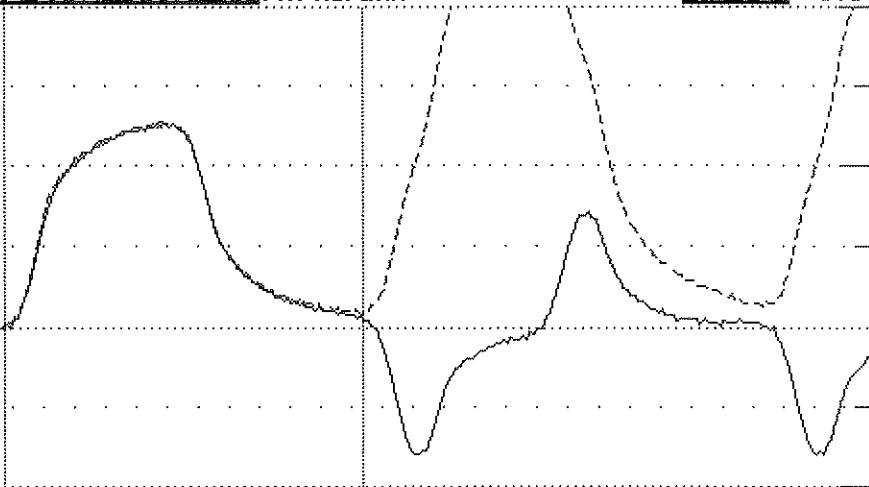

contact Pile Dynamics USA
 with your questions
 tel USA - 216 - 831- 6131
 fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: A19990

CALIBRATION FACTOR: 1020 G/V

PAK (*5000): _____ DATE: 28-DEC-06

PDA OPERATOR: [Signature]

<-AT:PIEZORESISTIVE

OP: alex Iver:4.051

AT:PIEZOELECTRIC->