


| | |
|---|---|
| Pile Dynamics 28-Dec-06 12:39 LE 39.6 ft AR 1.7 in2 EM 30000 Ksi SP 0.492 K/ft3 MS* 16810 ft/s MC 17228 ft/s CAUTION JC 0.40 FM 1.00 VM 1.00 EA/C 30.3 Ks/ft UN KIPSS 1 FR 20000 MB 30 DL -43 UT -1 PK 1 TM-PEAK F1 500 F2 213 A1 999 A2 1050 | FS — BN 436 10 SL 2641/ 3440/ 99 PJ: sn PN: HOPBAR TG F2 -- US A2 F2 3.3 TS 12 B PD: a19995 LP 0.00 ft TB 8.0 T1 9.4 2L/C 4.6 UA 1000 UE 1022 LI 1.0 |
|---|---|



ACCEL SQ-OFF FL-OFF PR-OFF
 VMX= 4.3 FMX= 67 AMX= 149
 EMX= 0.3 MEX= 131 FVP= 1.01

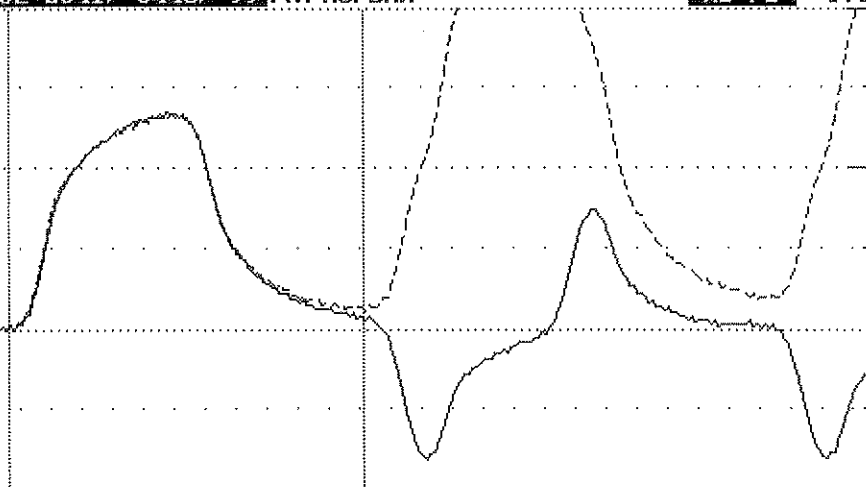

contact Pile Dynamics USA
 with your questions
 tel USA - 216 - 831- 6131
 fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable
 SERIAL NUMBER: A19995
 CALIBRATION FACTOR: 1050 G/V
 PAK (*3000): _____ DATE: 28-DEC-06
 PDA OPERATOR: [Signature]