


Pile Dynamics 28-Dec-06 12:41 LE 39.6 ft AR 1.7 in ² EM 30000 Ksi SP 0.492 K/ft ³ WS* 16810 ft/s WC 17228 ft/s CAUTION JC 0.40 FM 1.00 UM 1.00 EA/C 30.3 Ks/ft UN KIPS FR 20000 MB 30 DL -41 UT -1 PK 1 TM-PEAK F1 500 F2 213 A1 999 A2 1045	FS — BN 440 10 SL 2641/ 3440/ 99 PJ: sn PN: HOPBAR TG F2 -- US A2 F2 3.3 TS 12 B PD: a20002 LP 0.00 ft TB 8.0 T1 9.6 2L/C 4.6 UA 1000 UE 1022 LI 1.0
--	---



ACCEPT SQ-OFF FL-OFF PR-OFF

UMX= 4.4 FMX= 68 AMX= 139
 EMX= 0.3 MEX= 133 FUP= 0.99

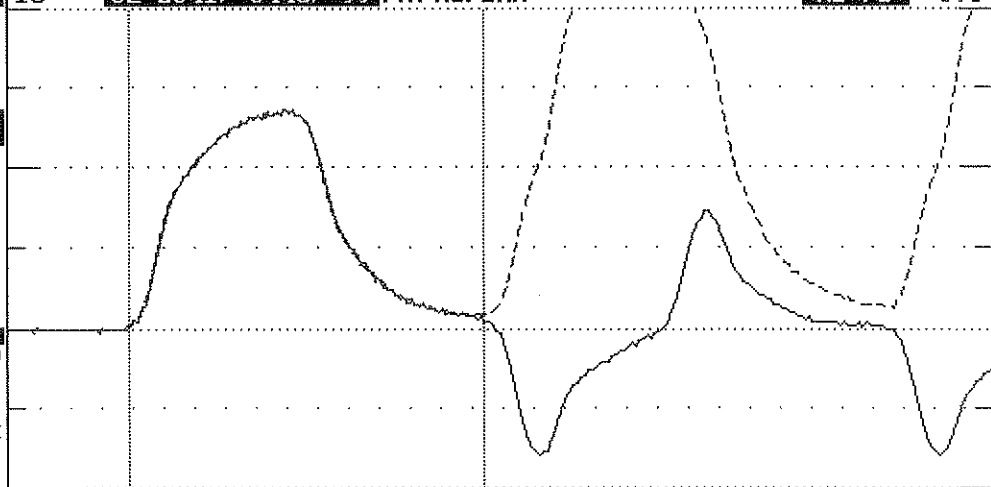

contact Pile Dynamics USA
 with your questions
 tel USA - 216 - 831- 6131
 fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: A20002

CALIBRATION FACTOR: 1045 6V

PAK (*5000): _____ DATE: 28-DEC-06

PDA OPERATOR: [Signature]