


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

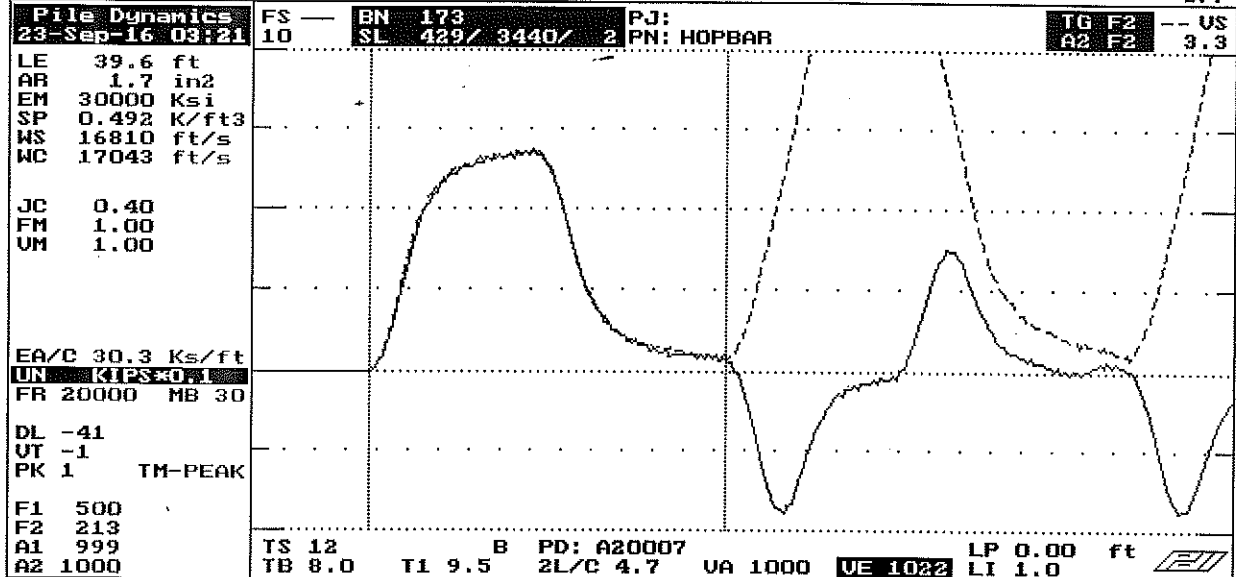

ACCEPT SQ-OFF FL-OFF PR-OFF	VMX= 4.4 FMX= 68 AMX= 139 EMX= 0.3 MEX= 133 FVP= 1.00
	ACCELEROMETER CALIBRATION N.I.S.T. Traceable
contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916	SERIAL NUMBER: <u>A20007</u> CALIBRATION FACTOR: <u>1000 g/v</u> PAK (*5000): _____ DATE: <u>23 SEPT 16</u> PDA OPERATOR: <u>[Signature]</u>
<-AT:PIEZORESISTIVE	OP: laine [ver:4.05] AT:PIEZOELECTRIC->