

Pile Dynamics  
10-Mar-04 15:49

FS —  
10

BN 1052  
SL 2610/ 3440/ 99

PJ:  
PN: HOPBAR

TG F2 -- US  
A2 F2 3.3

LE 39.6 ft  
AR 1.7 in2  
EM 30000 Ksi  
SP 0.492 K/ft3  
WS 16810 ft/s  
WC 16862 ft/s


JC 0.40  
FM 1.00  
VM 1.00

EA/C 30.3 Ks/ft  
UN ~~KIPS~~ 0.1  
FR 20000 MB 30

DL -41  
UT -1  
PK 1 TM-PEAK

F1 500  
F2 213  
A1 999  
A2 1011

TS 12 E B PD: 10841 LP 0.00 ft  
TB 8.0 T1 9.7 2L/C 4.7 UA 1000 UE 1024 LI 1.0

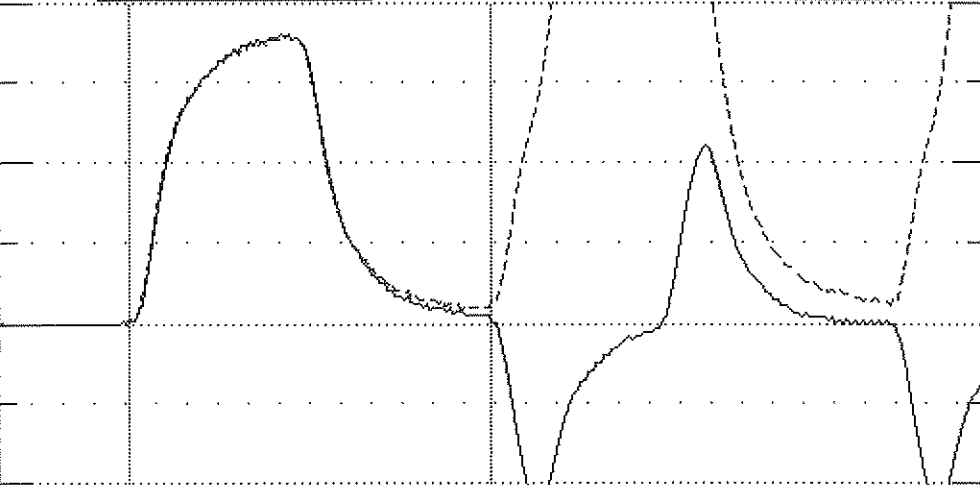

ACCEPT SQ-OFF FL-OFF PR-OFF



contact Pile Dynamics USA  
with your questions  
tel USA - 216 - 831- 6131  
fax USA - 216 - 831- 0916

VMX= 5.8 FMX= 90 AMX= 189  
EMX= 0.5 MEX= 176 FUP= 1.01

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 10841

CALIBRATION FACTOR: 1011 G/V

PAK ~~(5000)~~: DATE: 10-Mar-04

PDA OPERATOR: Fred Phazain

<-AT:PIEZORESISTIVE

OP: FRED [ver:4.05]

AT:PIEZOELECTRIC->