


Pile Dynamics 27-Sep-06 11:03		FS — 10	BN 421 SL 2612/ 3440/ 99	PJ: sn PN: HOPBAR	TG F2 -- US A2 F2 3.3
LE 39.6 ft	AR 1.7 in2	EM 30000 Ksi	SP 0.492 K/ft3	MS 16810 ft/s	WC 16862 ft/s
JC 0.40	FM 1.00	VM 1.00			
EA/C 30.3 Ks/ft	UN KIPS/ft	FR 20000 MB 30			
DL -40	UT -1	PK 1 TM-PEAK			
F1 500	F2 213	A1 999	A2 990	TS 12	B PD: 10860-060
				TB 8.0	T1 9.4 2L/C 4.7 UA 1000
					LP 0.00 ft
					LI 1.0



ACCEPT SQ-OFF FL-OFF PR-OFF

VMX= 3.9 FMX= 60 AMX= 129
 EMX= 0.3 MEX= 117 FUP= 0.99

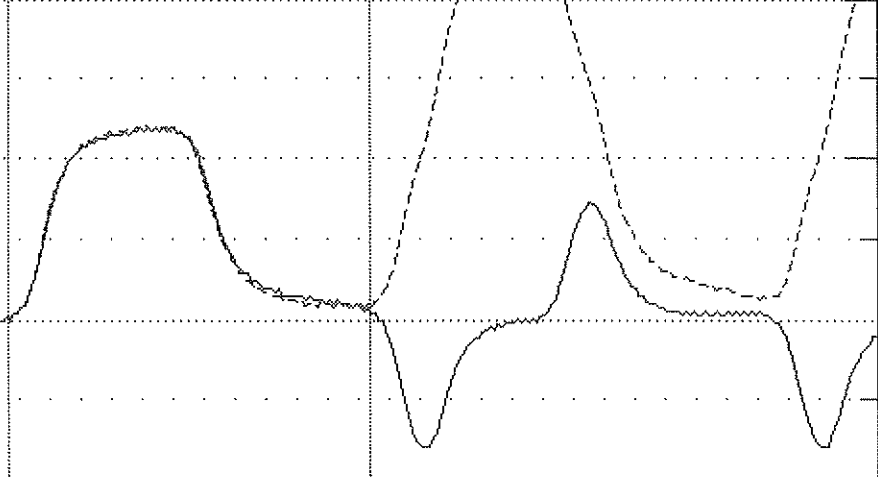

contact Pile Dynamics USA
 with your questions
 tel USA - 216 - 831- 6131
 fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 10860

CALIBRATION FACTOR: 990 61V

PAK (<5000): _____ DATE: 28-SEP-06

PDA OPERATOR: *[Signature]*

<-AT:PIEZORESISTIVE

OP: alex [ver:4.05]

AT:PIEZOELECTRIC->