



<b>Pile Dynamics</b> <b>14-Mar-05 09:21</b> LE 39.6 ft AR 1.7 in2 EM 30000 Ksi SP 0.492 K/ft3 MS 16810 ft/s WC 16862 ft/s  JC 0.40 FM 1.00 UM 1.00  EA/C 30.3 Ks/ft UN <del>KIPS=0.1</del> FR 20000 MB 30  DL -40 UT -1 PK 1 TM-PEAK  F1 500 F2 213 A1 999 A2 1035	FS — BN 100 10 SL 2508/ 3440/ 99  PJ: PN: HOPBAR  TG F2 -- US A2 F2 3.3
--	--

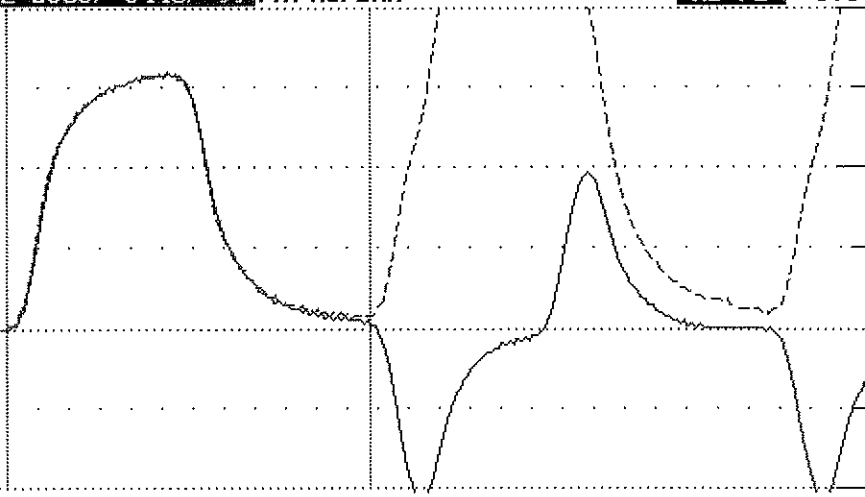

ACCEPT SQ-OFF FL-OFF PR-OFF   contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916	TS 12 B PD: 11033-060 LP 0.00 ft FF-2 TB 8.0 T1 9.6 2L/C 4.7 UA 1000 VE 1022 LI 1.0 UF-2  VMX= 5.1 FMX= 80 AMX= 179 EMX= 0.4 MEX= 156 FUP= 1.00
--	---

ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: 11033 CALIBRATION FACTOR: 1035 G/V PAK (*5800): _____ DATE: 14-Mar-05 PDA OPERATOR: Fred Hume	OP: FRED [ver:4.05]
--	---------------------