

File Dynamics	FS —	BN 799	PJ: sn	TG F2 -- US
30-Dec-09 09:06	10	SL 2934/ 3440/ 99	PN: HOPBAR	A2 F2 3.3


LE 39.6 ft
 AR 1.7 in2
 EM 30000 Ksi
 SP 0.492 K/ft3
 WS 16810 ft/s
 WC 16862 ft/s

JC 0.40
 FM 1.00
 UM 1.00

EA/C 30.3 Ks/ft
 UN KIPS:0.1
 FR 20000 MB 30

DL -34
 UT -1
 PK 1 TM-PEAK

F1 500
 F2 213
 A1 999
 A2 1015

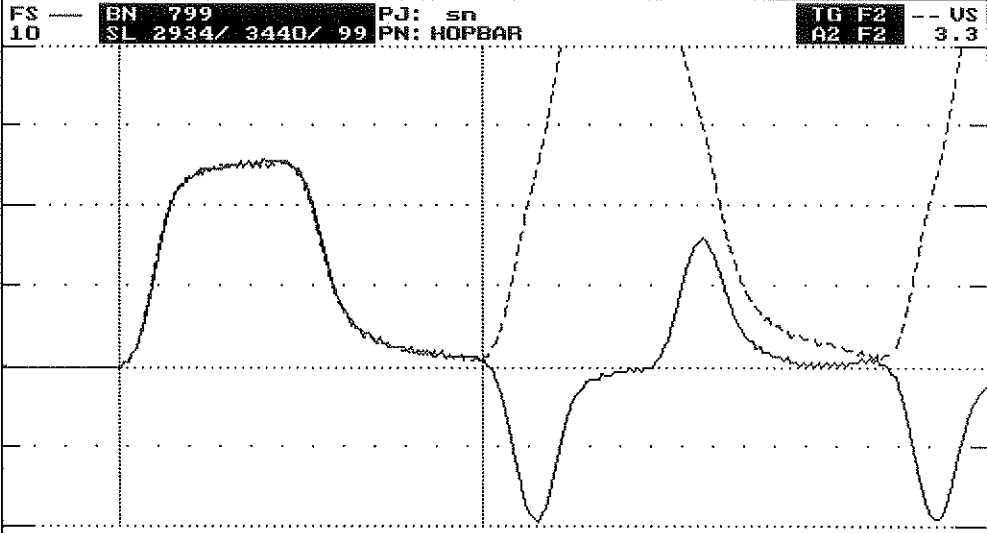

TS 12 B PD: 11034-060 LP 0.00 ft
 TB 8.0 T1 9.5 2L/C 4.7 VA 1000 UE 1022 LI 1.0

ACCEPT SQ-OFF FL-OFF PR-OFF	UMX= 4.2	FMX= 64	AMX= 149
	EMX= 0.3	MEX= 125	FUP= 1.00



contact Pile Dynamics USA
 with your questions
 tel USA - 216 - 831- 6131
 fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable
 SERIAL NUMBER: 11034
 CALIBRATION FACTOR: 1015 G/v
 DATE: 30-Dec-09
 PDA OPERATOR: Dale Bassett

<-AT:PIEZORESISTIVE

OP: dale [ver:4.05]

AT:PIEZOELECTRIC->