


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

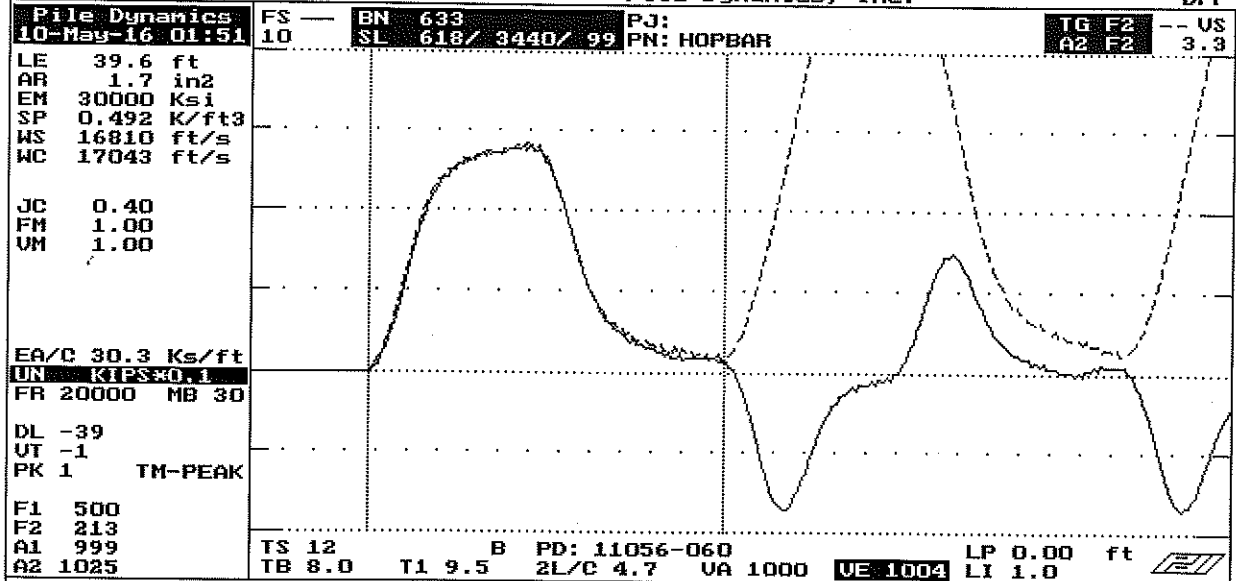

ACCEPT SQ-OFF FL-OFF PR-OFF	VMX= 4.6 FMX= 70 AMX= 139 EMX= 0.3 MEX= 137 FUP= 0.99
<p>contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916</p>	ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: 11056 CALIBRATION FACTOR: 1025% PAK (*5000): DATE: 10MAY16 PDA OPERATOR: <i>[Signature]</i>
	OP: laine lver:4.051
	AT: PIEZOELECTRIC

<-AT:PIEZORESISTIVE

OP: laine lver:4.051

AT:PIEZOELECTRIC->