

QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

Pile Dynamics
05-Mar-15 05:48

FS —
10

BN 1020
SL 696/ 3440/ 2

PJ:
PN: HOPBAR

TG F2 -- US
A2 F2 3.3

LE 39.6 ft
AR 1.7 in2
EM 30000 Ksi
SP 0.492 K/ft3
WS 16810 ft/s
WC 16862 ft/s


JC 0.40
FM 1.00
VM 1.00

EA/C 30.3 Ks/ft
UN KIPS=0.1
FR 20000 MB 30

DL -39
VT -1
PK 1 TM-PEAK

F1 500
F2 213
A1 999
A2 1000

TS 12 B PD: 16212-060 LP 0.00 ft
TB 8.0 T1 9.6 2L/C 4.7 VA 1000 UE 1022 LI 1.0

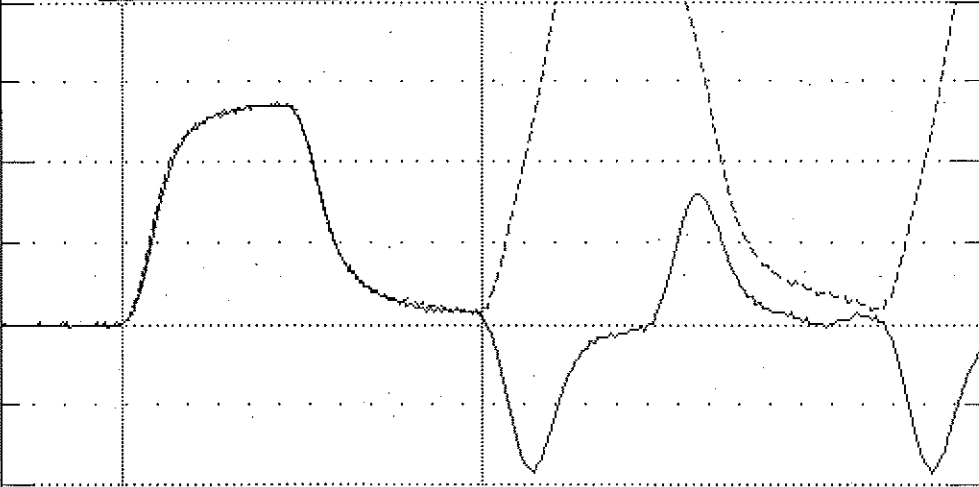

ACCEPT SQ-OFF FL-OFF PR-OFF



contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

VMX= 4.5 FMX= 68 AMX= 149
EMX= 0.3 MEX= 133 FUP= 1.01

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 16212

CALIBRATION FACTOR: 1000%

PAK (5000): DATE: 6MAR15

PDA OPERATOR: M. W. W. W.

<-AT:PIEZORESISTIVE

OP: laine [ver:4.05]

AT:PIEZOELECTRIC->